



GT500RW



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Gotcha Sensor with two weatherproof, corrosionproof floodlights, molded gaskets and corrosionproof universal cover plate. Lamps not supplied.

SPECIFICATIONS

UL Listing

Suitable for wet locations.

Voltage

120 volts AC 60 Hz.

Power Consumption

1 watt

Time Adjustment

10 seconds to 5 minutes

Surge Protection

Withstands up to 6000 volts

Photoelectric Control

Deactivates lights during daylight

Detector Sensitivity

Adjustable from 100% to 50%

Wall Switch Manual Override

Two flip logic prevents activation by momentary power outages. Override resets to auto after 6 hours or at dawn. No extra wiring needed.

Sensor Housing

Made of tough, corrosion resistant polycarbonate

Floodlights

Made of tough, corrosion-resistant polycarbonate. For extra or replacement floodlights, order cat# TUFFY in your choice of color. Accepts PAR-38 lamps, medium base, 150 watts max. Lamps not included.

Detection

110° view

Patents


RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Weight
1.65


Color

White

DIMENSIONS

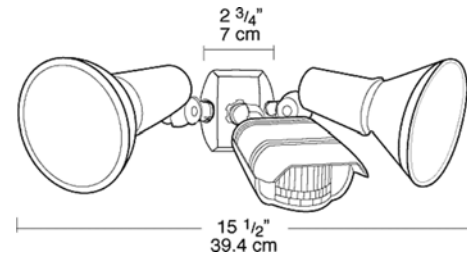

DETECTION PATTERN

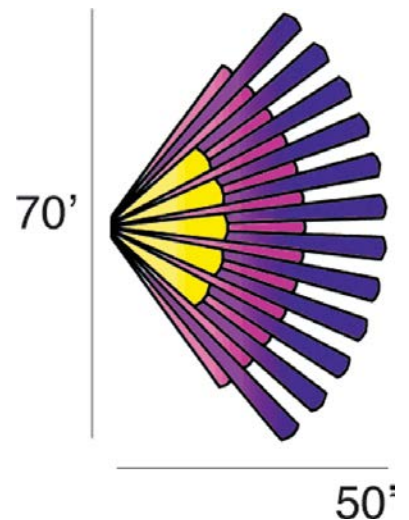

Note: Specifications may change without notice