

HSLED INSTALLATION INSTRUCTIONS



Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000, or email: marketing @rabweb.com

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.


RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

WALL MOUNTING

Mount to a weatherproof junction box and cover plate (not supplied) as shown. To ensure weatherproof seal, apply weatherproof silicone sealant back of junction box. This is especially important with an uneven wall surface.

- 1. Thread fixture into **Cover Plate**. Seal arm thread using teflon tape or silicone sealant.
- 2. Connect wires as shown in the wiring diagram.
- 3. Attach Cover Plate to Junction Box.
- 4. Aim floodlight in the direction desired and tighten locknut and **Arm Screw**.

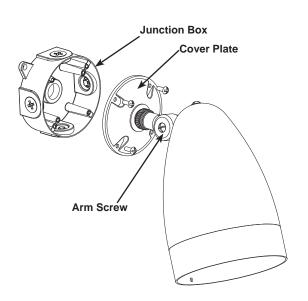


Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

GROUND MOUNTING

Mount to a Mighty Post(RAB C at# MP19) as shown.

- 1. Thread fixture into **Mighty Post Cap**. Seal arm thread using teflon tape or silicone sealant.
- 2. Connect wires as shown in the wiring diagram and place inside the **Mighty Post**.
- 3. Place Mighty Post Cap on the Mighty Post.
- 4. Aim floodlight in the direction desired and tighten locknut and **Arm Screw**.

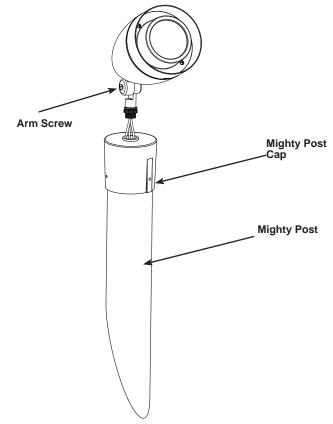




HSLED INSTALLATION INSTRUCTIONS

WIRING

Universal voltage driver permits operation at the following voltages, 50 or 60 Hz.

- 1. Connect the black fixture lead to the (+) LINE supply lead.
- 2. Connect the white fixture lead to the (-) COMMON supply lead.
- 3. Connect the GROUND wire from fixture to supply ground.



TROUBLESHOOTING

- 1. Check that the line voltage at fixture is correct.
- 2. Is there voltage at the lamp fixture wires? If there is no voltage, check all connections.
- 3. Is the fixture grounded properly?
- 4. If there is a photocell, is it working properly?

CLEANING & MAINTENANCE

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

- 1. Clean glass lens & fixture with non-abrasive glass cleaning solution.
- 2. Do not open fixture to clean the LED. Do not touch the LED.
- 3. Keep leaves and debris out of hood.

HSLED13	HSLED13N		HSL	HSLED13Y	
lighting facts	ight	Ing facts®		ghting f	ac Program of
Light Output (Lumens) Watts Lumens per Watt (Efficacy)	787 Light Output 15 Watts	LANY THE	15 Watt	: Output (Lumens) s ens per Watt (Effica	cy)
Color Accuracy Color Rendering Index (CRI)	67 Color Accurac Color Rendering Ind			Accuracy lendering Index (CRI)	-
Light Color Correlated Color Temperature (CCT) 510	0 (Daylight)	erature (CCT) 4000 (Bright		t Color ted Color Temperature (CCT)	30
Warm White Bright White 2700K 3000K 4500K	Daylight Warm White 6500K 2700K 3000K	Bright White Daylight 4500K	Warm 6500K 2700K	White Bright White	4500

product test data and results.

Model Number: HSLED13N

Easy Installation & Product Help

Type: Outdoor decorative fixture

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: WVMA-PCD2P1 (11/21/2011) Model Number: HSLED13 Type: Outdoor decorative fixture



Tech Help LineToll Free FaxCall our expertsSend a fax to RAB888 RAB-1000888 RAB-1232

AB **rabweb.com** Visit our website for product info

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and

Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: WVMA-FWAR71 (11/21/2011)

e-mail Answered promptly sales@rabweb.com

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

)0K

RAB

544 15 36

87

6500K

000 (Bright White)

Daylight

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: WVMA-BRHH25 (11/21/2011) Model Number: HSLED13Y Type: Outdoor decorative fixture

HSLED-IN-0112