



JOB NAME: _____
 DATE: _____
 TYPE: _____

RB4T5

DESCRIPTION

RAB offers energy efficient fluorescent fixtures for large space lighting including warehouses, factories, and distribution centers. The RBAY delivers the high quality needed for these applications with strong, heavy duty 22 gauge rigid housing with no sharp edges. The superior strong-box protective foam case packaging protects the RBAY so it arrives in perfect shape and ready to install.

SPECIFICATIONS

UL Listing

Damp locations. UL listed.

Housing

Heavy duty 22 gauge steel housing and wiring box with 1/2" NPS knockouts. Painted white. Easy wiring and maintenance access panel. Includes "Y" hooks.

Color

White

Weight

15.1

Reflector

Aluminum High Performance brilliant bevel segmented reflectors.

Lamp

T5HO (not supplied)

Ballast

Programmed Start, High Ambient, Universal Voltage 120 - 277V (suitable for use with occupancy sensors)

Ballast Minimum Starting Temperature

0° F

CRI

85

Total Watts

4x54W

Input Volts

120-277V

Input Amps

.2.0/.85

Ballast Factor

1.00

Base

Medium Bi Pin.


Mounts

Surface or Chain (Y Hooks included)

Patents

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws .

DIMENSIONS

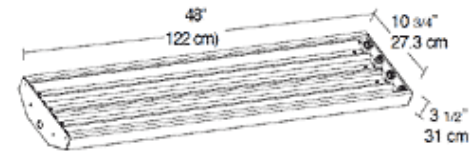

ORDERING INFORMATION

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
216	T5HO	Med Bi Pin	Programmed Start 2				0.85	241.0	N/A	4740	20000

Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
 © 2011