

DESCRIPTION

CATALOG: E-750-U-260	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS – LAMP TYPE: 1 - F96T12, 2 - F96T12
-------------------------	-----------------------------	-----------------------------------	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 - 277 V~ ± 10%	LAMP WATTS: 60/75 w	INPUT WATTS: 134 w	INPUT CURRENT: 1.12/0.5 A	OCV: 660 v	PF: > 0.97	FREQUENCY: 50/60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.86	BEF: 0.64	LAMP CONNECTION: PARALLEL	THD (1): < 19%	NO PCB'S

(1) FOR 2-F96T12

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS							
	UNITS	M1	M2	M3	W	L	H	
	INCHES	2.0	11.14	10.5	3.11	11.75	1.78	
	TOL(+/-)	0.01	0.03	0.01	0.05	0.10	0.08	
MM	51	283	267	79	298	45		
TOL(+/-)	0.25	0.8	0.25	1.30	2.50	2.00		
LEAD LENGTH								
UNITS	BLACK	WHITE	RED	BLUE	BLUE			
INCHES	22	22	57	47	47			
TOL(+/-)	3/8	3/8	3/8	3/8	3/8			
MM	559	559	1448	1194	1194			
TOL(+/-)	10	10	10	10	10			

CARTON CHARACTERISTICS

UNITS/CARTON 6	CARTONS/LAYER 12	# OF LAYERS 8	UNITS/PALLET 576	PIECE WEIGHT 3.74 lbs	CARTON WEIGHT 23 lbs	PALLET WEIGHT 2,285 lbs
CARTON / PALLET 96	CARTON DIMENSIONS 12" x 12" x 4"	PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED INCLUDING WOOD PALLET 40" x 48" x 40"			

MISC.

--

CARTON LABEL

ISB SOLA BASIC

CAT. E-750-U-260

UNIVERSAL VOLTAGE 120/277 1.120/0.500 A


50/60 Hz UNITS 6

FOR 1 or 2 LAMPS
F96T12 or F9612/SS
or F72T12 or F48T12
or F48T12/SS

INSTANT START
ELECTRONIC BALLAST

MADE IN MEXICO

ELECTRICAL DIAGRAM

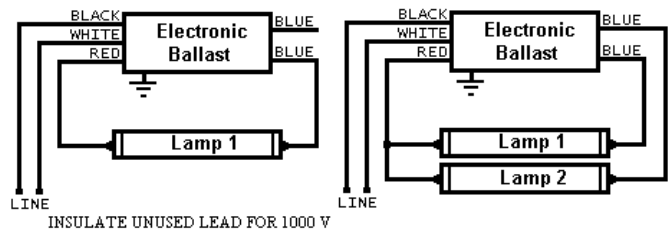

PRODUCT LABEL

SOLA

UNIVERSAL VOLTAGE 120/277 V~ 1.120/0.500 A 660 OCV 50/60 Hz INSTANT START ELECTRONIC BALLAST

E-750-U-260

HIGH POWER FACTOR

SOUND RATED A 5 YEAR WARRANTY

UL LISTED 5P 49 SF LRI106469 NO PCB'S G07 MINIMUM 0°C MADE IN MEXICO

CLASS P INHERENT THERMAL PROTECTION TYPE 1 OUTDOOR

CAUTION: HAZARDOUS VOLTAGE BEFORE INSTALLING OR REPLACING INSULATE UNUSED LEAD FOR 1000 V

GROUND BALLAST CASE INSTALL IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES

ISO 9001:2000

QMI REGISTERED



Data is based upon test performed by Industrias Sola Basic in a controlled environment and representatives of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.