

### DESCRIPTION

CATALOG: <b>E620-F-23488-TP</b>	STARTING METHOD: Rapid Start	INPUT VOLTAGE: 120 V~	OCV: 795 V~	FREQUENCY: 60 Hz	
BALLAST TYPE: Magnetic Sign	CLASS: P	TYPE: 2 outdoor	LAMP CONNECTION: Series	SOUND RATED: D	NO PCB'S

### ELECTRICAL CHARACTERISTICS\*

LAMP TYPE	NUMBER OF LAMPS	LAMP FOOTAGE (ft)	LAMP WATTS	MIN. START TEMP. (°F/°C)	INPUT WATTS (Watts)	INPUT CURRENT (Amps)	BALLAST FACTOR	B.E.F.	P.F.	THD %	LAMP CREST FACTOR
F72T12/HO	2	12	87	-20/-29	184	1.66	0.82	0.445	0.92	20	1.7
F72T12/HO	3	18	87	-20/-29	245	2.06	0.80	0.326	0.99	12	1.7
F72T12/HO	4	24	87	-20/-29	290	2.51	0.83	0.286	0.96	7	1.5

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	2.0	13.75	13.125	3.187	14.312	2.625
	TOL(+/-)	0.010	0.010	0.010	0.080	0.050	0.050
	MM	51	350	333	81	363	66
TOL(+/-)	0.25	0.25	0.25	2.00	1.30	1.30	
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW	BLUE/WH	BROWN
INCHES	24	24	32	75	75	78	52
TOL(+/-)	3/8	3/8	3/8	3/8	3/8	3/8	3/8
MM	610	610	813	1905	1905	1981	1320
TOL(+/-)	10	10	10	10	10	10	10


### CARTON CHARACTERISTICS

UNITS/CARTON 4	CARTON/LAYER 9	# OF LAYERS 4	UNITS PALLET 144	PIECE WEIGHT 16.25 lbs	CARTON WEIGHT 66 lbs	PALLET WEIGHT 2 417 lbs
CARTON PALLET 36	CARTON DIMENSIONS 12" x 14 3/4" x 4"	PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 24"			


### MISC.

\*Will operate any 2, 3 or 4 T12/HO(800 mA) lamp combinations provided the total lamp length is not less than 12ft. nor more than 24ft. See product label for further wiring instructions. White Painted Can.


#### CARTON LABEL

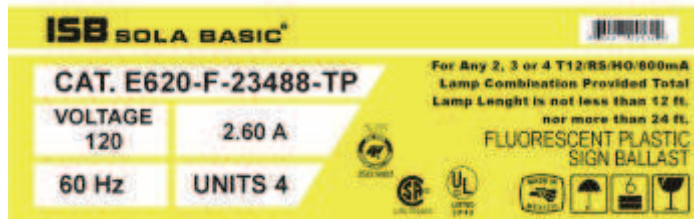

#### ELECTRICAL DIAGRAM

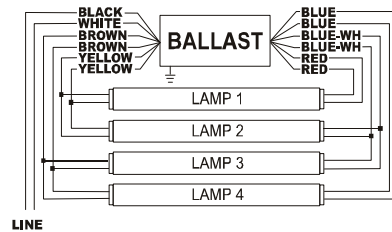

#### PRODUCT LABEL

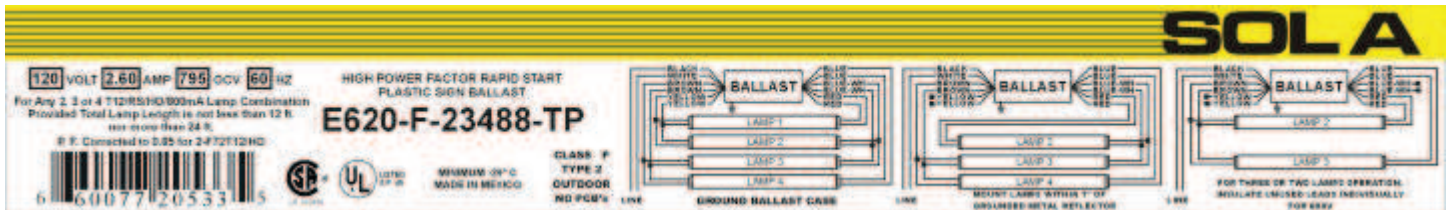

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Made in Mexico by Industrias Sola Basic S.A. de C.V.

**Lighting and Power Source**  
 2840 Keller Springs Road,  
 Suite 1102 & 1103  
 Carrollton, TX 75006 – 4832  
 Tel: (888) 385-4448  
 Fax: (972) 418-5858