

SORAA® PREMIUM 2

LED MR16 2700K 12VAC 10-12W



Narrow Flood and Flood



Narrow Spot



RoHS

OUTPUT	1550-7500 CBCP, 490-590 Lumens
BEAM	10°, 20°, 25°, 36°
COLOR	CCT: 2700K CRI>80, R9>0
APPLICATION	Halogen replacement for indoor applications

PERFORMANCE

CBCP matches standard halogen lamps
 Single light source
 Single crisp shadow
 Dimmable to 20%
 Power Factor: 0.93
 12V (10.8 min, 13.2 max)

COLOR

CCT: 2700K
 CRI>80, R9>0
 White point accuracy within 3 SDCM
 Rich saturated color rendering
 Excellent color stability

OPTIMIZED FORM

ANSI standard MR16 form factor:
 1.96" (50mm) W x 1.86" (47.6mm) H
 Compatible with standard fixtures
 Weight: 40g
 Proprietary fanless aluminum design
 provides superior thermal dissipation

HIGHLY COMPATIBLE

Works with magnetic and electronic
 transformers and dimmers (see complete
 list at www.soraa.com)
 UL and CUL listed for use with 12VAC NEC
 Class 1 and Class 2 systems

SPECIFICATIONS*

Reference Number	Product Code	Beam	Field	CBCP	Watts	Halogen Equivalent**	Lumens
MR16-65-B01-12-827-10	00267	10°	20°	7500	10	65W	490 (49 lm/W)
MR16-75-B01-12-827-20	00235	20°	38°	3700	11.5	75W	590 (51.5 lm/W)
MR16-75-B01-12-827-25	00243	25°	42°	3360	11.5	75W	590 (51.5 lm/W)
MR16-75-B01-12-827-36	00251	36°	60°	1550	11.5	75W	590 (51.5 lm/W)

* at stable operating conditions in well ventilated fixtures (25°C ambient) **Energy Star Minimum

LONG LIFE, LOW MAINTENANCE

Life of 35,000 hours
 Three year warranty

ENERGY EFFICIENT

Saves over 85% of energy compared to
 standard halogen lamps
 Typical payback of one year or less

INTENDED USE AND APPLICATIONS

LED retrofit lamp to replace 12VAC
 halogen MR16 lamps in recessed
 downlights, track lighting, and other
 indoor applications
 Not recommended for use in fixtures
 with glass lenses, fully sealed fixtures, or
 unventilated fixtures less than 3"L x 3"W
 x 3"H
 Not for use in Emergency Fixtures or Exit
 Signs
 Operating Temperature: Minimum-40°C
 (ambient); Typical: 80-110°C (base);
 Maximum: 120°C (base)
 Soraa lamps are designed to safely turn
 down in any thermal environment not
 conducive to minimum airflow or proper
 ventilation

CERTIFICATIONS

UL, CUL for 12VAC NEC Class 1 and Class
 2 systems, FCC 47 CFR Part 15 and Part 18
 (EMI), RoHS, CE, C-tick

12VAC




2700K

CRI
>80



DIM





The diagram at left shows how to read the
 different components of the reference num-
 ber. Base type B01 refers to the GU 5.3 base.



SORAA PREMIUM 2 LED MR16 2700K 12VAC 10-12W

PHOTOMETRICS



Narrow Spot - 10°





Narrow Flood- 20°




Narrow Flood -25°




Flood -36°

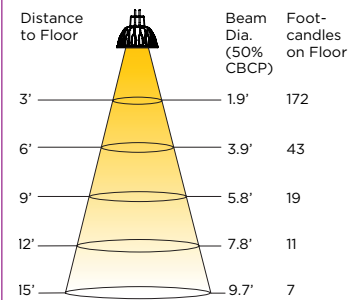

DIMENSIONS

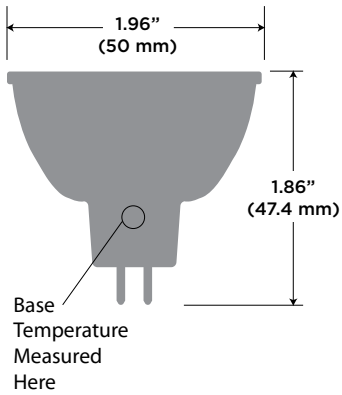

COLOR RENDERING

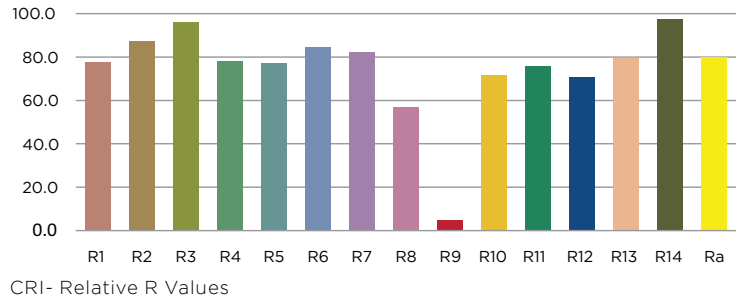

SAFETY NOTE ON HEAT

Soraa's unique LED technology allows its lamps to operate effectively and efficiently at higher temperatures than other LED lamps, resulting in more light output per diode. Although Soraa's lamps operate at cooler temperatures than halogen lamps, it is recommended that gloves be worn when handling bare lamps that have been energized.

TRANSFORMER/DIMMER COMPATIBILITY

Dimmable to 20% or lower, depending on dimmer. Complete transformer and dimmer compatibility information available at www.soraa.com.