


SUPERLINE™ MR-16 LAMPS









GU5.3

All dimensions are in millimeters

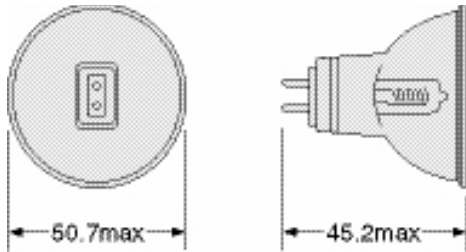

LAMP SOCKET

The model C-33U socket is rated up to 24V-7A for use with all low voltage USHIO GU5.3 based MR-16 lamps. The metal clips secure the lamp firmly into the socket. Use Ordering Code 1002142



Watts (W)	Ushio Ordering Code	Ushio Lamp Code	Voltage (V)	Color Temp (K)	Beam Angle	Beam Spread	Luminous Intensity (cd)	Avg Life (h)	Burn Position
20	1000043	BBF/SL	12	2950	24°	Narrow Flood	870	5000	Universal
20	1000020	BAB/SL	12	2950	36°	Flood	510	5000	Universal
20	1000015	BAB/FG/SL	12	2950	36°	Flood	510	5000	Universal
35	1000563	FMV/SL	12	2950	24°	Narrow Flood	2000	5000	Universal
35	1000560	FMV/FG/SL	12	2950	24°	Narrow Flood	2000	5000	Universal
35	1000577	FMW/SL	12	2950	36°	Flood	1200	5000	Universal
35	1000574	FMW/FG/SL	12	2950	36°	Flood	1200	5000	Universal
50	1000440	EXZ/SL	12	3050	24°	Narrow Flood	3000	5000	Universal
50	1000431	EXZ/FG/SL	12	3050	24°	Narrow Flood	3000	5000	Universal
50	1000409	EXN/SL	12	3050	36°	Flood	1580	5000	Universal
50	1000406	EXN/FG/SL	12	3050	36°	Flood	1580	5000	Universal



Superline™ lamps are manufactured under ISO 9001 guidelines ensuring quality and security for the purchaser

Form No. S-MR16SL/R-1007
The specifications on this sheet supercede all previously published specifications and may be subject to change for design and specification improvement without prior notice.

© 2007 USHIO America, Inc. All rights reserved.

Distributed by: