

TCP InstaBright G2 covered CFLs

8,000 Hours average rated life,
120Volts

Applications:

Ideal for frequent start applications such as signs requiring rapid flashing.

Replaces Incandescent for:

- + Vanities
- + Decorative
- + Down-lighting
- + Track-lighting
- + Table/Floor Lamps
- + Indoor/Outdoor
- + Enclosed/Open




Special Application Options: (Ordering Suffix)

- 3000°K (30K), 3500°K (35K), 4100°K (41K), 5000°K (50K), 6500°K (65K)

Features and Benefits

- Fastest starting covered CFL reaches full brightness in seconds
- Fast run-up time and build-up time, lamps turns on instantly
- Patented technology using amalgam mercury
- RoHS Compliant

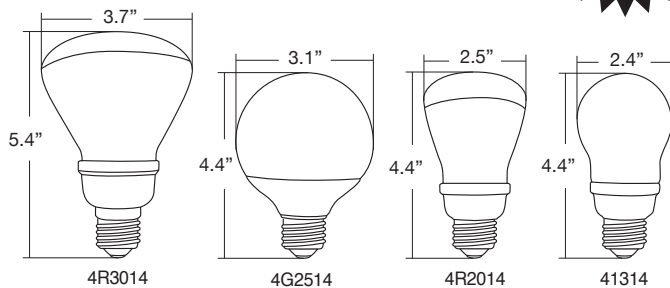

★ = ENERGY STAR® approved

Catalog Number

Notes

Type




Specifications (at full brightness)

End of Life Protection	Yes
Ballast Type	Electronic
Input Line Voltage:	120VAC
Input Line Frequency	50/60HZ
Lamp Life (Rated)	8,000 hrs
Color Temperature	2700°K
Color Rendering Index	82
Minimum Starting Temp	-20°F
Maximum Operating Temp.....	160°F
UL/cUL Listed	Yes
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor	<1.60
Maximum Open Circuit Voltage	600V
Power Factor	>.50
Total Harmonic Distortion	<150%

Special Application Notes

- UL approved for wet location in Base Up position only. Base Up position is defined as screw base in a 12:00 position. Any other base position must be in a UL approved weatherproof fixture.

Warranties and Certifications:	Item #	Description	Wattage	Incandescent Wattage Comparison	Initial Lumens	M.O.L. (inches)	Diameter (inches)	Input Line Current	Lamp Shape
RoHS COMPLIANT  12 MONTH WARRANTY TCP reserves the right to void the warranty for any mis-application of these products.	4R2014	14 WATT R20 InstaBright G2	14	50	410	4.4	2.5	.026A	R20
	★ 4R3014	14 WATT R30 InstaBright G2	14	65	650	5.4	3.7	.026A	R30
	41314	14 WATT A19 InstaBright G2	14	75	750	4.4	2.4	.026A	A19
	★ 4G2514	14 WATT G25 InstaBright G2	14	60	800	4.4	3.1	.026A	G25