

LED Dimmable PAR20

50,000 Hours average rated life, 120Volts

Applications:


Ideal for dimmable PAR20 flood and spot applications.

- + Track Lights
- + Recessed Downlights
- + Display Lights
- + Outdoor fixtures that protect from elements




Features and Benefits

- Smooth, uniform dimming from 100% to 5%
- Energy Efficient: Up to 80% less energy than halogen alternatives
- Exceeds all industry performance requirements.
- Long life: Designed for 50,000 hours (lasts at least 15 times longer than alternative) 25,000 hour rated life for ENERGY STAR qualified lamps.
- Very Durable: Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design. Shatter resistant.
- Very low heat generation – excellent for sensitive display lighting.
- Excellent Color consistency and high color rendering (CRI).
- Available in black and white housings

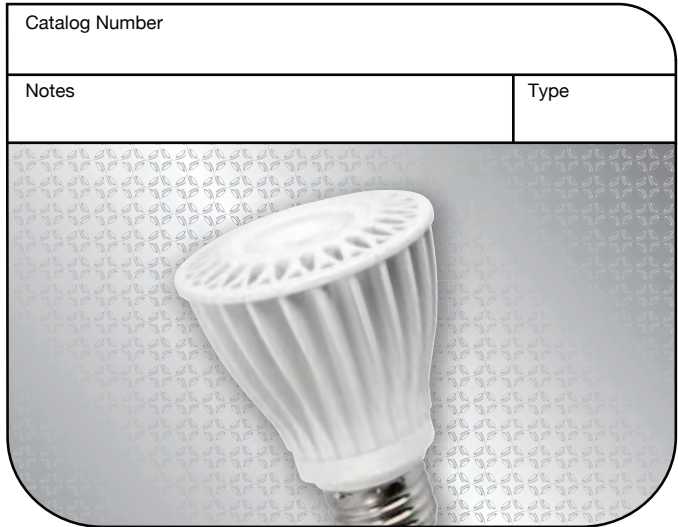


Specifications

Input Line Voltage:	120 VAC
Input Power	9 W
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 to 50,000 hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C

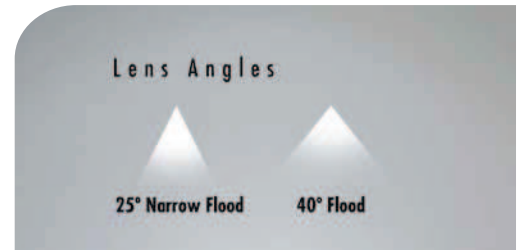

* For black housing option, add suffix "B" to the end of the item number

Warranties and Certifications:	Item #	Description	Voltage	Wattage	Lumens	LPW	CBCP	Beam Angle	M.O.L. (inches)	Diameter (inches)	CCT	CRI	Case Quantity	STK/MTO	
	 5 YEAR WARRANTY	PAR20 Narrow Flood													
LED9E26P2027KNFL		LED 9W PAR20 Narrow Flood – 2700K	120	9	460	50.0	2070	25	3.5	2.5	2700	85	12	STK	
LED9E26P2030KNFL		LED 9W PAR20 Narrow Flood – 3000K	120	9	500	55.6	2250	25	3.5	2.5	3000	85	12	STK	
LED9E26P2041KNFL		LED 9W PAR20 Narrow Flood – 4100K	120	9	530	60.0	2385	25	3.5	2.5	4100	80	12	STK	
LED9E26P2050KNFL		LED 9W PAR20 Narrow Flood – 5000K	120	9	560	64.4	2520	25	3.5	2.5	5000	80	12	MTO	
PAR20 Flood															
LED9E26P2027KFL		LED 9W PAR20 Flood – 2700K	120	9	460	51.1	754	40	3.5	2.5	2700	85	12	STK	
LED9E26P2030KFL		LED 9W PAR20 Flood – 3000K	120	9	500	55.6	820	40	3.5	2.5	3000	85	12	STK	
LED9E26P2041KFL	LED 9W PAR20 Flood – 4100K	120	9	530	60.0	869	40	3.5	2.5	4100	80	12	STK		
LED9E26P2050KFL	LED 9W PAR20 Flood – 5000K	120	9	560	64.4	918	40	3.5	2.5	5000	80	12	MTO		

MTO = Made to Order – 1 to 2 week delivery. Currently, 15 degree, 4100K and 5000K CCT will be MTO.

CBCP was estimated based on known photometry. Consult www.tcp.com for most current photometry & LM79 data.