

JCD & JCV SERIES

- Only for Use in Approved Enclosed Halogen Fixtures
- 2-Pin Base - GY6.35
- Double Contact Bayonet Base - BA15d
- Universal Burn Position

• 120 Volts (except as noted)

Watts	Ushio Ordering Code	Ushio Lamp Code	Dimensions			Filament Type	Approx Lumens lm	Color Temp K	Avg Life h	Bulb Finish	Case Qty	Fig No
			Dia (A)	MOL (B)	LCL (C)							
2-Pin Base – GY6.35												
35	1000902	JCD120V-35W	0.43	2.17	1.50	CC-2V	500	2800	1500	Clear	10	1
50	1000905	JCD120V-50W	0.43	2.17	1.50	CC-2V	700	2800	1500	Clear	10	1
75	1000908	JCD120V-75W	0.45	2.17	1.50	CC-8	1100	2850	1500	Clear	10	2
Double Contact Bayonet Base – BA15d												
75	1000986	JCV120V-75WGB	1.38	2.32	1.38	CC-8	1200	2800	1000	Clear	10	3
75	1000987	JCV120V-75WGBF	0.55	2.83	1.38	CC-8	1125	2850	1000	Frosted	10	3
100	1000968	JCV120V-100WGB	0.51	2.44	1.38	CC-8	1600	2800	2000	Clear	10	3
100	1000969	JCV120V-100WGBF	0.51	2.44	1.38	CC-8	1550	2800	2000	Frosted	10	3
100	1000364	ESR, JCV120V-100WGB2	0.51	2.44	1.38	CC-2V	1800	2850	750	Clear	10	4
100	1000374	ETD, JCV120V-100WGB2F	0.51	2.44	1.38	CC-2V	1750	2850	750	Frosted	10	4
150	1000373	ETC, JCV120V-150WGB	0.51	2.44	1.38	CC-8	2800	2900	2000	Clear	10	3
150	1000362	ESP, JCV120V-150WGB2	0.51	2.44	1.38	CC-2V	2800	2900	1000	Clear	10	4
150	1000376	ETF, JCV120V-150WGBF	0.51	2.44	1.38	CC-8	2700	2900	2000	Frosted	10	3
200	1000512	FEV, JCV120V-200WCB2	0.51	2.44	1.38	CC-2V	5500	3200	50	Clear	10	4
200	1001803	JCV230V-200WGB	0.60	2.48	1.38	CC-8	5000	2800	2000	Clear	20	3
250	1000365	ESS, JCV120V-250WGB	0.51	2.99	1.61	CC-8	5000	3000	2000	Clear	10	3
250	1000372	ETB, JCV120V-250WGBF	0.51	2.99	1.61	CC-8	4800	3000	2000	Frosted	10	3
250	1000990	JCV130V-250WGBF	0.51	2.99	1.61	CC-8	4800	3000	2000	Frosted	10	3
500	1000979	JCV120V-500WGB	0.51	3.43	2.13	CC-8	10450	2950	2000	Clear	10	3
500	1000980	JCV120V-500WGBF	0.51	3.43	2.13	CC-8	10100	2950	2000	Frosted	10	3

All dimensions shown in inches unless otherwise noted.

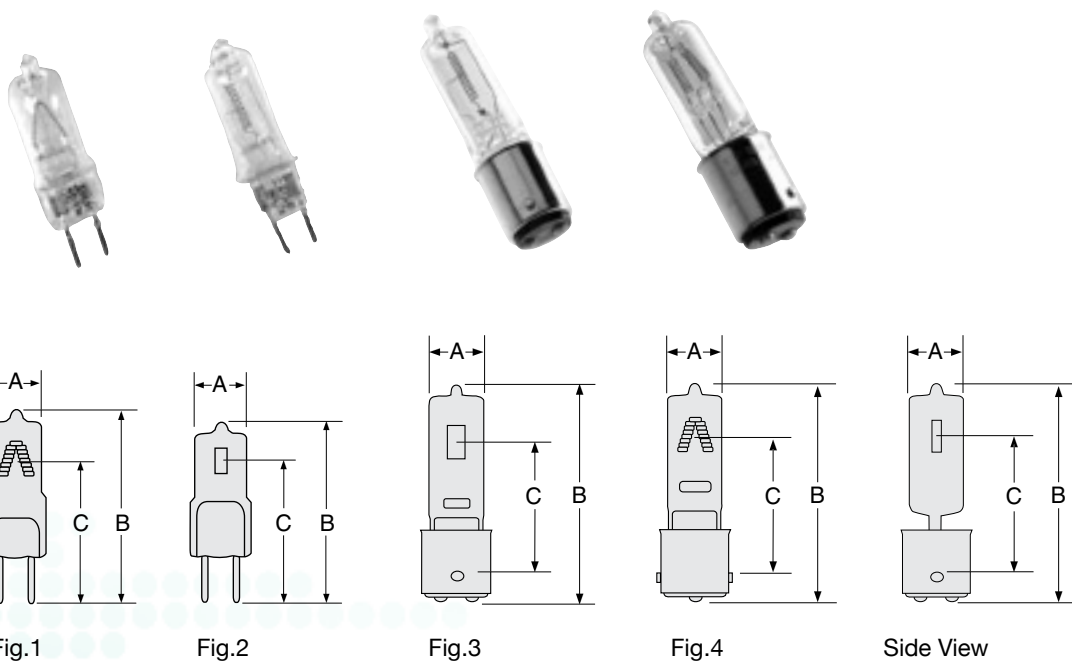


Fig.1

Fig.2

Fig.3

Fig.4

Side View

JCV SERIES

- Only Use Halogen Fill Lamps in Approved Enclosed Halogen Fixtures
- Universal Burn Position
- 120 Volts (except as noted)



Watts	Ushio Ordering Code	Ushio Lamp Code	Dimensions			Filament Type	Approx Lumens lm	Color Temp K	Avg Life h	Bulb Finish	Case Qty
			Dia (A)	MOL (B)	LCL (C)						
Krypton Fill – Mini Candelabra Base – E11 (Incandescent = cooler than halogen)											
20	1000973	JCV120V-20WGSN/E11/INC	0.41	2.56	1.77	CC-8	200	2700	2000	Clear	50
40	1000978	JCV120V-40WGSN/E11/INC	0.41	2.56	1.81	CC-8	560	2800	2000	Clear	10
60	1000982	JCV120V-60WGSN/E11/INC	0.47	2.56	1.81	CC-8	960	2800	2000	Clear	100
Halogen Fill – Mini Candelabra Base – E11											
75	1000988	JCV120V-75WGSN	0.47	2.72	1.26	CC-8	1125	2800	1000	Clear	10
75	1000989	JCV120V-75WGSNF	0.47	2.56	1.26	CC-8	1170	2850	1000	Frosted	10
100	1000970	JCV120V-100WGSN	0.55	2.72	1.26	CC-8	1600	2850	1000	Clear	10
100	1000971	JCV120V-100WGSNF	0.55	2.72	1.26	CC-8	1550	2800	2000	Frosted	10
100	1000361	ESN, JCV120V-100WGSN2	0.51	2.80	1.38	CC-2V	1800	2850	750	Clear	10
100	1000375	ETE, JCV120V-100WGSN2F	0.51	2.80	1.38	CC-2V	1750	2850	750	Frosted	10
150	1000377	ETG, JCV120V-150WGSN	0.51	2.80	1.38	CC-8	2800	2900	2000	Clear	10
150	1000378	ETH, JCV120V-150WGSNF	0.51	2.80	1.38	CC-8	2700	2900	2000	Frosted	10
150	1000359	ESL, JCV120V-150WGSN2	0.51	2.80	1.38	CC-2V	2800	2900	1000	Clear	10
250	1000294	EHT, JCV120V-250WGSN	0.53	3.15	1.63	CC-8	5000	3000	2000	Clear	10
250	1000360	ESM, JCV120V-250WGSNF	0.51	3.15	1.61	CC-8	4800	3000	2000	Frosted	10
250	1000991	JCV130V-250WGSN	0.51	3.15	1.61	CC-8	5000	3000	2000	Clear	10
250	1001809	JCV130V-250WGSNF	0.51	3.15	1.61	CC-8	4850	3000	2000	Frosted	10
250	1003485	JCV220/230V-250WM	0.59	2.95	—	CC-2V	4500	2900	2000	Clear	10
250	1000993	JCV220/230V-250WMF	0.59	2.95	—	CC-2V	4500	2900	2000	Frosted	10
300	1000961	JCV100V-300WGS	0.59	3.07	1.65	CC-8	4650	2850	3000	Clear	10
300	1001813	JCV120V-300WGS	0.59	3.07	1.65	CC-8	4650	2950	1500	Clear	10
325	1000295	EHV, JCV120V-325WBS	0.51	3.15	1.61	CC-8	7800	3100	500	Clear	10
400	1000976	JCV120V-400WGSN	0.51	3.62	2.01	CC-8	8250	2950	2000	Clear	50
400	1000977	JCV120V-400WGSNF	0.51	3.62	2.01	CC-8	7850	2950	2000	Frosted	50
500	1000384	EVR, JCV120V-500WGS	0.51	3.62	2.01	CC-8	10450	2950	2000	Clear	10
500	1000466	EYX, JCV120V-500WGSF	0.51	3.62	2.01	CC-8	9500	3000	2000	Frosted	10
500	1000465	EYW, JCV130V-500WGS	0.51	3.62	2.01	CC-8	10000	3000	2000	Clear	10
500	1000464	EYV, JCV130V-500WGSF	0.51	3.62	2.01	CC-8	9500	3000	2000	Frosted	10
500	1000995	JCV230V-500WGS	0.51	3.62	2.00	CC-8	9000	2950	2000	Clear	50
750	1000463	EYT, JCV120V-750WB1	0.51	3.74	2.01	CC-8	18500	3050	500	Clear	10
1000	1000967	JCV120V-1000WC3	0.53	3.93	2.01	CC-8	26000	3200	300	Clear	10

All dimensions shown in inches unless otherwise noted.

