
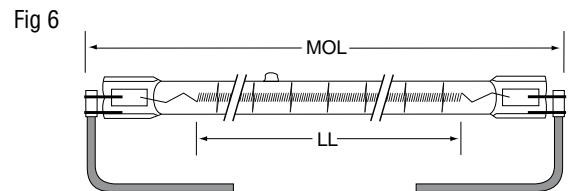
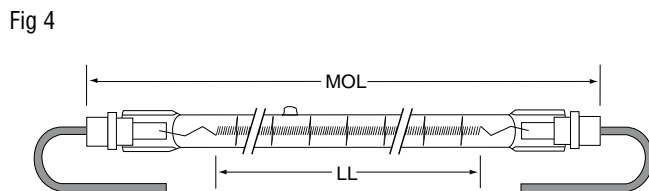


Design Voltage	Ushio Ordering Code	Ushio Lamp Code	Dimensions			Color Temp (K)	Avg Life (h)	Fig No	Alternate Designation	Lamp Notes
			MOL (mm)	LL (mm)	L1 (mm)					
3800 Watts										
420	1001369	QIH420-3800T/S	1062.0	965	—	2500	5000	1	3800T3/HT	
420	1003046	QIH420-3800/VS	1062.0	965	—	2500	5000	1		
570	1001392	QIH570-3800/L	1062.0	965	—	2500	5000	4	—	
570	1001393	QIH570-3800/S	1062.0	965	—	2450	5000	1	QH3800T3/CL	
570	1001394	QIH570-3800/VL	1062.0	965	—	2500	5000	4	—	
570	1001395	QIH570-3800/VS	1062.0	965	—	2450	5000	1	3800T3/CL/VB	
570	1001397	QIH570-3800T/S	1062.0	965	—	2450	5000	1	QH3800T3	
570	1001398	QIH570-3800T/VS	1062.0	965	—	2450	5000	1	QH3800T3/VB	
4600 Watts										
370	1003449	QIH370-4600/C	263.0	190	—	3150	100	6	—	
4900 Watts										
480	1001388	QIH480-4900/VL	1341.3	1245	—	2500	5000	4	—	
5000 Watts										
480	1001389	QIH480-5000/S	1559.0	1496	—	2300	5000	1	5000T3/NBL	
600	1001402	QIH600-5000/S	732.0	638	—	2500	5000	1	QH5M/T3/1CL/HT	
5800 Watts										
480	1001390	QIH480-5800/VL	1621.0	1524	—	2500	5000	4	—	

Please contact National Customer Service Center for detailed specifications and special design requirements.

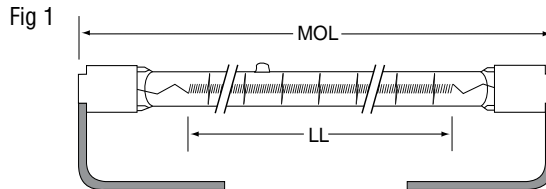

Dimensions
 MOL = Maximum Overall Length
 LL = Lighted Length (filament length) (avg.)
 L1 = Designated Length (avg.)
 Maximum bulb diameter: 11mm
 All dimensions are in millimeters (mm)

Lamp Notes
 F = Faston Terminal (FR = Faston Receptacle, FT = Faston Tab)
 IW = Insulated Wire
 R = Ring Tongue Terminal
 S = Spade Tongue Terminal
 Standard Lead Wire Length: 145mm

