

LE6

6" Recessed Adjustable Downlight

Product Description

The LE6 is an adjustable downlight module for new construction and retrofit that installs easily in most standard six inch recessed IC or non-IC housings. The LE6 can be adjusted from 10 to 30 degrees, allowing the user to smoothly wash a wall. The LE6 generates white light with LEDs in a new way that enables an unprecedented combination of light output, high efficacy, beautiful color, and affordability. U.S. Patent #7,213,940 issued. Numerous patents pending.

Performance Summary



- 500 Delivered Lumens at 30 Degrees Tilt
- Nominal Input Power of 12W
- CCT = 2700K or 3500K
- CRI = 92
- Dimmable to 20%

Ordering Information

- LE6** - 120V, Incandescent Color (2700K), Edison Base (STANDARD)
- LE6-GU24** - 120V, Incandescent Color (2700K), GU24 Base
- LE6C** - 120V, Neutral Color (3500K), Edison Base
- LE6C-GU24** - 120V, Neutral Color (3500K), GU24 Base

Accessories - Reference individual specification sheets for more detail

- RC6 Series** 6" Recessed Housing
- RR6 Series** 6" Recessed Retrofit Housing
- SC6 Series** 6" Surface Mount Housing



LE6

6" Recessed Adjustable Downlight

Specifications and Features Light Emitting Diodes

- Cree proprietary technology delivers uniform, high-quality, white light
- Designed to last 50,000 hours and maintain at least 70% of initial lumen output
- Active color management system maintains color point consistency

Construction

- Integrated thermal management system conducts heat away from LEDs and transfers it to the surrounding environment. LED junction temperatures stay below specified maximums when installed in attic insulation with temperatures exceeding 60 degrees Celsius.

Optical System

- Proprietary optical system utilizes a unique combination of reflective and refractive optical components to achieve a uniform, comfortable appearance. Pixelation and direct view of uncomfortable LEDs is eliminated. Designed to wash a wall with light.

Electrical System


- Integral, high efficiency driver and power supply. Power factor >0.95 Input voltage = 120V, 60Hz
- Dimmable to 20% with most incandescent dimmers (reference www.creelighting.com for recommended dimmers)

Regulatory

- Tested and certified to UL standards. Suitable for damp locations
- Suitable for insulated or non-insulated ceilings

Photometry

LE6 ITL Test #61449
Tilted to 30°

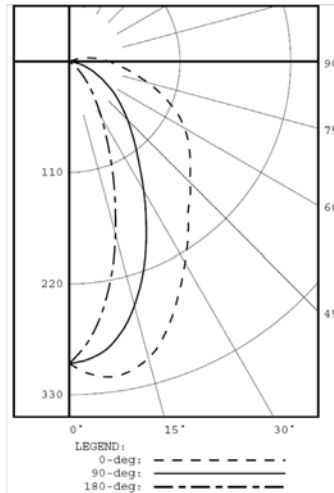

Intensity (Candlepower) Summary


ANGLE	0°	45°	90°
0°	299	299	299
5°	312	307	293
15°	304	291	250
25°	256	243	181
35°	206	191	120
45°	170	155	82
55°	145	126	54
65°	117	92	30
75°	81	58	14
85°	50	33	3
90°	40	24	0
95°	30	16	0
105°	13	4	0

Zonal Lumen Summary

ZONE	LUMENS	%FIX
0°- 30°	182	36.3
0°- 40°	262	52.3
0°- 60°	393	78.8
0°- 90°	487	97.6
0°-180°	500	100

Installation

- Designed to easily install in standard 6" downlight housings from Cree and other manufacturers.*
 - Quick install system utilizes a unique retention feature. Attach socket to module. Adjust module to ready position and slide into housing. Rotate module 1/4 turn to the right to lock in place
- * Reference www.creelighting.com for housing compatibility

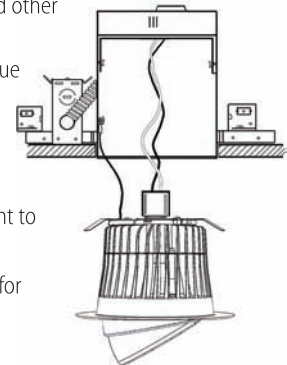

Application Information

Spacing	Luminaires 3' from wall on 3' centers		
Height	Footcandle Values		
10	13	13	13
9	18	18	18
8	18	18	18
7	15	15	15
6	13	13	13
5	11	11	11
4	9	9	9
3	8	8	8
2	7	7	7
1	6	6	6

Spacing	Luminaires 3' from wall on 4' centers		
Height	Footcandle Values		
10	8	10	8
9	12	14	12
8	13	13	13
7	11	11	11
6	9	9	9
5	8	8	8
4	7	7	7
3	6	6	6
2	5	5	5
1	5	5	5

Notes: Average initial illuminance in footcandles, reflectances = 80/50/30, ceiling height = 10', based on minimum of 5 luminaires, placed in a hallway with width = 6', aimed at center points 3' and 4' apart respectively



Cree LED Lighting
Morrisville • NC • 27560 • USA
1-919-287-7700
Fax 1-919-991-0730
www.CreeLighting.com