




GE
Lighting

10244 - F20T12/BL 6PK

GE T12 - Blacklight

- Passes TCLP, which can lower disposal costs.

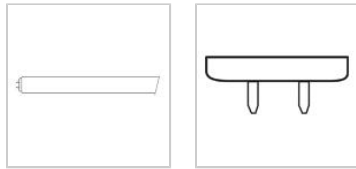

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Do not use excessive force when installing lamp.
 - Wear safety glasses and gloves when handling lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Percent Irradiance

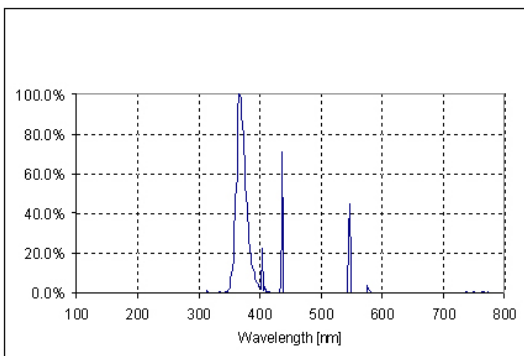

Graphs_Spectral Power Distribution

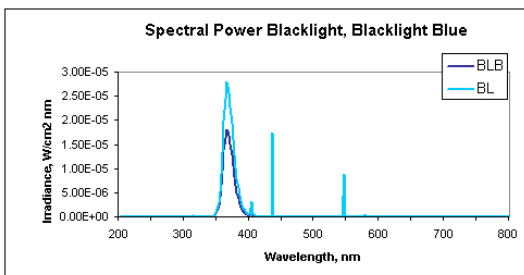

Graphs_UV Maintenance

For additional information, visit www.gelighting.com

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T12
Base	Medium Bi-Pin (G13)
Bulb Finish	Blacklight/blacklight blue
Rated Life	9000.0 hrs
Rated Life (instant start) @ Time	9000 h @ 3 h
Starting Temperature (MIN)	10.0 °C
Additional Info	TCLP compliant
Primary Application	Blacklight

ELECTRICAL CHARACTERISTICS

Wattage	20.0
Voltage	57.0
Open Circuit Voltage (rapid start) (MAX)	220.0 V
Open Circuit Voltage (rapid start) Min @ Temperature	157 V @ 10 nV
Cathode Resistance Ratio - Rh/ Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V


DIMENSIONS

Maximum Overall Length (MOL)	24.0000 in(609.6 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA)	1.500 in(38.1 mm)
Face to End of Opposing Pin (B) (MAX)	23.500 in(596.9 mm)

PRODUCT INFORMATION

Product Code	10244
Description	F20T12/BL 6PK
Standard Package	BUNDLE
Standard Package GTIN	00043168102445
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168953078

Relative UV Maintenance

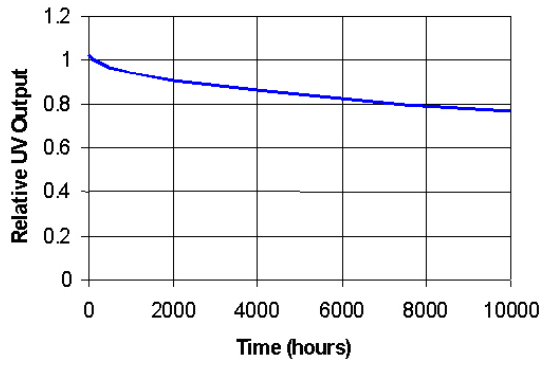

Graphs_UV Maintenance

