



Commercial Products & Solutions

→ HOME **PRODUCTS** ▶ EDUCATION / RESOURCES ▶ LIGHTING APPLICATIONS SITE SEARCH

Where to Buy | FAQs | Contact Us | EliteNet


Products > 14682

14682 - LU750

GE Lucalox® High Pressure Sodium ED37



Lamp type	High Intensity Discharge - High Pressure Sodium
Bulb	ED37
Base	Mogul Screw (E39)
Bulb Finish	Clear
Wattage	750
Rated Life (MIN)	24000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
LEED-EB MR Credit	9 picograms Hg per mean lumen hour

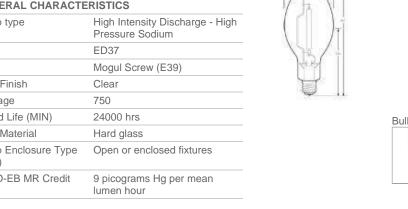



PHOTOMETRIC CHARACTERISTICS	
Initial Lumens	110000
Mean Lumens	99000
Nominal Initial Lumens per Watt	146
Color Temperature	2100 K
Color Rendering Index	22

Nominal Initial Lumens per Watt	146
Color Temperature	2100 K
Color Rendering Index (CRI)	22


Catalogs Testimonials MSDS (Material Safety Data Sheets) **Disposal Policies & Recycling Information**

ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
Warm Up Time to 90% (MIN)	3 min
Warm Up Time to 90% (MAX)	4 min
Hot Restart Time to 90% (MAX)	1 min

GRAPHS & CHARTS Spectral Power Distribution

ADDITIONAL RESOURCES

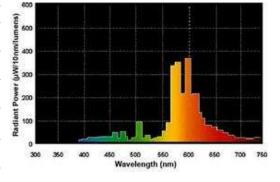

DIMENSIONS

Maximum Overall Length (MOL)	11.5000 in (292.1 mm)
Nominal Length	11.500 in (292.1 mm)
Bulb Diameter (DIA)	4.625 in (117.4 mm)
Light Center Length (LCL)	6.750 in (171.4 mm)

PRODUCT INFORMATION

Product Code	14682
Description	LU750
ANSI Code	S111

Standard Package	Case
Standard Package GTIN	10043168146828
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168146821

▲ CAUTIONS & WARNINGS

See list of cautions & warnings.

Return To Top

Home | Products | EliteNet | Education/Resources | Lighting Applications | Where to Buy | FAQs | Contact Us | Site Map
Products for Your Home | Press Room | Corporate | Investor Information | Privacy Policy | Accessibility Statement | Terms of Use
Copyright General Electric Company 1997-2009