




GE
Lighting

15378 - CSR575/2/SE

GE Quartz Metal Halide T9 - Stage & Studio

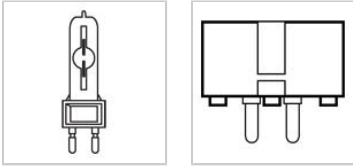

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.
 - Dispose of lamp in a closed container.
- Risk of Burn
 - Allow lamp/fixture to cool before handling.
 - Turn power off before installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Use in enclosed fixture rated for this product.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not exceed 110% of rated voltage.

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Quartz Metal Halide
Bulb	T9
Base	Prefocus Medium 2-Pin (GX9.5)
Wattage	575
Voltage	97
Rated Life	1000 hrs
LEED-EB MR Credit	1327 picograms Hg per mean lumen hour
Primary Application	Stage & Studio

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	49000
Nominal Initial Lumens per Watt	85
Color Temperature	7200 K
Color Rendering Index (CRI)	80
CIE Color x	0.302
CIE Color y	0.32

ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
---------------	----------------------------

DIMENSIONS

Maximum Overall Length (MOL)	4.9200 in(125.0 mm)
Light Center Length (LCL)	2.560 in(65.0 mm)

PRODUCT INFORMATION

Product Code	15378
Description	CSR575/2/SE
Standard Package	Case
Standard Package GTIN	10043168153789
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168153782