

Mini Biax[®] CFLs

Slimmer Body. Reduced Overall Length. Longer Life. Opening more sockets to compact fluorescent

GE's new Mini Biax[®] compact fluorescent lamps feature smaller overall sizes (utilizing T3 glass) with increased life ratings versus older CFLs. GE offers both Triple Biax[®] and A-Line shapes that can replace incandescent lamps ranging from 40 to 75 watts. Smaller sizes and longer life ratings make the switch to CFL more attractive than ever before!

Outstanding energy efficiencies

Up to 75% energy cost savings vs. comparable incandescent lamps

Reduced size

Ballast housing maximum diameter down to 1.7" (42mm). Maximum overall length as low as 4.4" (112mm)

Long life

Triple Biax[®] products rated at 15,000 hours.
A-Line products rated at 10,000 hours.

Incandescent-like color

Warm, pleasing color (2700K).

Excellent color rendering

Rare earth phosphors provide bright, vibrant colors. Excellent CRI - 82

Reliable starting

To 5° F (-15° C)

Flicker-free instant start

Applications

- Table Lamps
- Downlighting
- Wall Sconces
- Corridor
- Offices
- Hospitality



GE Lighting

Mini Biax® CFLs






Performance Data

Product Code	Description	Rated Nominal Watts	Initial Lumens	Life (hours)	CRI	Color Temperature	Minimum Starting Temperature	Lamp Dimensions	
								A	B
20702	FLE12TT3/827	12	600	15,000	82	2700K	5° F (-15° C)	4.4" (112mm)	1.7" (42mm)
12004	FLE15TT3/827	15	900	15,000	82	2700K	5° F (-15° C)	4.9" (125mm)	1.7" (42mm)
12008	FLE20TT3/827	20	1200	15,000	82	2700K	5° F (-15° C)	5.5" (140mm)	1.7" (42mm)
20703	FLE12/A19/827	12	550	10,000	82	2700K	5° F (-15° C)	4.8" (123mm)	2.4" (61mm)
12010	FLE15/A19/827	15	825	10,000	82	2700K	5° F (-15° C)	5.4" (136mm)	2.4" (61mm)

Energy Savings

Wattage Replaced	INC Lamp Replaced	Energy Saving Replacement	Watts Saved	Life vs. Incand	Lumens vs. Incand	Estimated Energy Savings*
40	Soft White A-Line	FLE12TT3/827	28	122%	15X	\$42
40	Soft White A-Line	FLE12/A19/827	28	112%	10X	\$28
60	Soft White A-Line	FLE15TT3/827	45	107%	15X	\$68
60	Soft White A-Line	FLE15/A19/827	45	97%	10X	\$45
75	Soft White A-Line	FLE20TT3/827	55	103%	20X	\$83

*Estimated energy savings based on CFL rated life at 10¢ per KWH

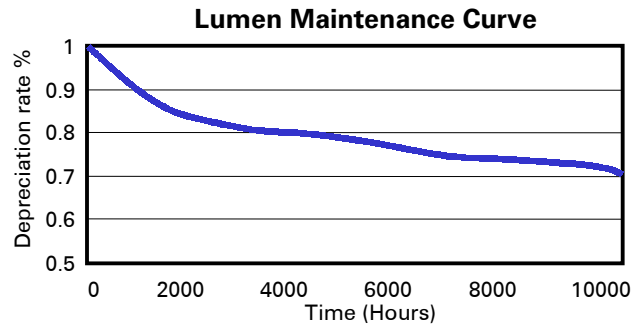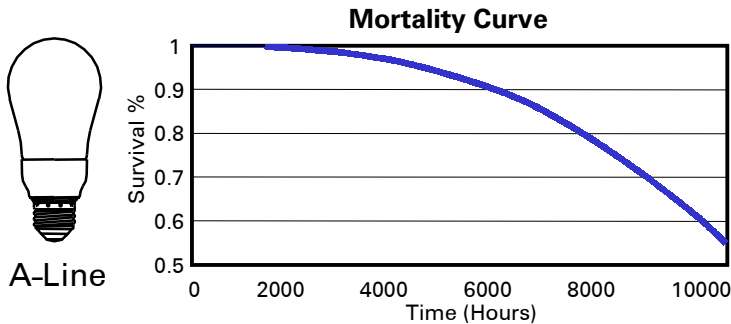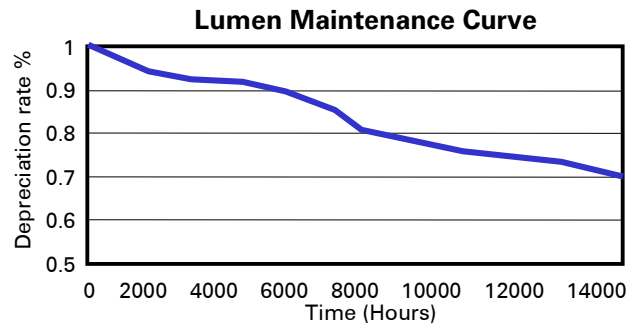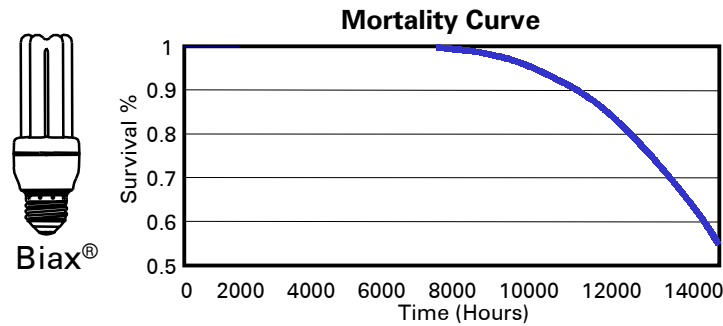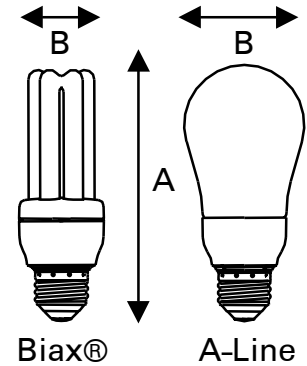

As an Energy Star Partner, GE Lighting has determined that these products meet the Energy Star guidelines for energy efficiency

For additional product and application information, please consult GE's Website:
www.gelighting.com

