

# METALARC® BRITELINE

## Double-Ended High Output Metal Halide Lamps



- Smaller light source allows for higher fixture efficiency
- Closer positioning of the reflector to the lamp allows more light out of the fixture and aimed to the desired area
- Compact, high-intensity, double-ended metal halide lamps
- Single point of contact for lamp and ballast questions, technical and warranty issues
- Ideal lamp for sports lighting applications
- Available in 1500 and 2000 watts

**SYLVANIA METALARC® BRITELINE 1500 and 2000 watt lamps are compact, high-intensity, double-ended metal halide sources.**

The compact shape allows for higher fixture efficiency compared to other lamps with a large outer jacket. The increased fixture efficiency can reduce the amount of “wasted” light thereby reducing the total fixture count while still providing the same or higher levels of illumination.

METALARC BRITELINE lamps are ideal for use in indoor and outdoor sports arenas and stadiums as well as for area flood lighting.

### Product Availability

Wattage	Bulb Shape	Base
1500	T7	RX7S RRSC
	T8	Ceramic, #8-10 spade
2000	T8	RX7S RRSC
	T9	Ceramic, #8-10 spade

### Lamp Comparison

Item Number	Ordering Abbreviation	Watts	Avg. Rated Life (hrs.)	Initial Lumens	Mean Lumens <sup>1</sup>	Results <sup>2</sup>
64431	M1500/BU-HOR	1500	3000	153,000	127,400	
66632	M1500T8/DE	1500	6000	150,000	127,500	Twice the lamp life
66631	M2000T9/DE	2000	3000	180,000	153,000	20% higher maintained light output

<sup>1</sup> M1500/BU-HOR mean lumens rated at 1200 hours, M1500T8/DE mean lumens rated at 2400 hours

<sup>2</sup> Compared to M1500/BU-HOR lamps in the horizontal burning position

### Application Information

#### Applications

Sports arenas/stadiums, outdoor sports fields, area flood lighting and architectural lighting

#### Fixtures

Consult your local fixture agent for available fixtures.

A METALARC BRITELINE fixture design guide including lamp specifications and recommendations on fixture design is available from OSRAM SYLVANIA.

#### Application Notes

1. Lamps must be used in a suitably enclosed fixture.
2. Operating position: Horizontal only ±4° tip up.
3. All metal halide and high pressure sodium lamps may be operated in any position.

**Sample Specifications**



Lamp(s) shall be (a) METALARC BRITE-LINE double-ended metal halide lamp(s) and shall have an 85% mean lumen maintenance. Lamp(s) shall have a correlated color temperature of 4200K and a CRI of 65.

**Ordering and Specification Information**

Item Number	Ordering Abbreviation	Watts	Bulb	Base	ANSI Ballast	Average Rated Life (hours)	Initial Lumens	Mean Lumens	CCT	CRI
66619	M1500T7/DE	1500	T7	RX7S RRSC	M_F <sup>1</sup>	3000	150,000	127,500	4200K	65
66632	M1500T8/DE	1500	T8	Ceramic #8-10 Spade	M133/F	6000	150,000	127,500	4200K	65
66627	M2000T8/DE	2000	T8	RX7S RRSC	M_F <sup>1</sup>	3000	200,000	170,000	4000K	65
66631	M2000T9/DE	2000	T9	Ceramic #8-10 Spade	M134/F	3000	180,000	153,000	4200K	65


<sup>1</sup> Consult your OSRAM SYLVANIA lighting representative for lamp/ballast compatibility

**Technical Information**

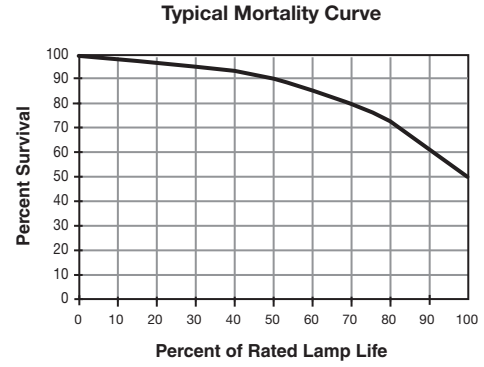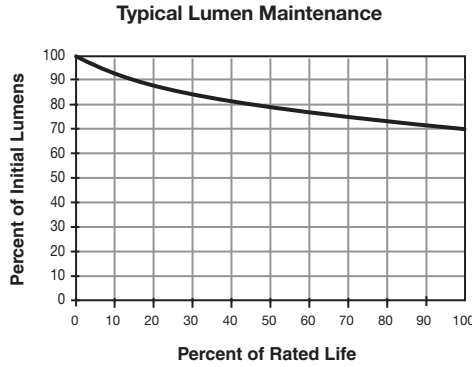

**Dimensions**

Ordering Abbreviation	(A) MOL (mm)	(B) LCL (mm)	(C) Diameter (mm)
M1500T7/DE	256	127	170.5
M1500T8/DE	254	127	110
M2000T7/DE	254	127	180
M2000T8/DE	254	127	108



**Ordering Guide**

<b>M</b>	<b>2000</b>	<b>T</b>	<b>9</b>	<b>/</b>	<b>DE</b>
M = METALARC	Wattage: 1000, 1500 or 2000 watts	Tubular	Nominal diameter in eighths of an inch		Double-ended

OSRAM SYLVANIA  
National Customer Service and Sales Center  
18725 N. Union Street  
Westfield, IN 46074

**Industrial Commercial**

Phone: 1-800-255-5042  
Fax: 1-800-255-5043

**National Accounts**

Phone: 1-800-562-4671  
Fax: 1-800-562-4674

**OEM/Specialty Markets**

Phone: 1-800-762-7191  
Fax: 1-800-762-7192

**Display/Optic**

Phone: 1-888-677-2627  
Fax: 1-800-762-7192

In Canada  
OSRAM SYLVANIA LTD.  
Headquarters  
2001 Drew Road  
Mississauga, ON L5S 1S4

**Industrial Commercial**

Phone: 1-800-263-2852  
Fax: 1-800-667-6772

**Special Markets**

Phone: 1-800-265-2852  
Fax: 1-800-667-6772

**Operate In Enclosed Fixtures Only**

To reduce the risk of personal injury and property damage resulting from an arc-tube rupture, this lamp must be operated in a suitably enclosed fixture and the "Proper Care and Maintenance" instructions must be followed. A suitably enclosed fixture uses lens/diffuser material able to contain hot lamp fragments (up to 1832°F, 1000°C). Enclosed fixtures which comply with UL 1598/CSA C22.2 No. 250 should withstand an arc-tube rupture. If you do not know whether your fixture can safely withstand an arc-tube rupture, contact your fixture manufacturer.

**Ultraviolet Radiation Exposure**

This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation. It MUST be operated in an enclosed fixture which filters out the shortwave ultraviolet radiation. Use ONLY in equipment provided with a lens cover of high temperature aluminosilicate glass or equivalent which filters out harmful shortwave ultraviolet radiation. A lens that meets the requirements of UL 1598/CSA C22.2 No. 250, section 9.4, titled, "ultraviolet (UV) attenuation barriers for metal halide lamps without integral UV blocking outer glass envelopes" should fulfill this requirement.

A power interlock device is strongly recommended to automatically turn off the lamp if the fixture assembly is opened or if the fixture lens is broken. If the fixture lens breaks and the lamp remains on, turn off power immediately and repair before re-energizing.

Due to the ultraviolet hazard, this lamp is to be used ONLY in equipment specifically designed for use with this lamp and recommended for its use by the equipment manufacturer.