

MSR Hot Restrike

MSR 2500 HR 1CT



Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data

• General Characteristics

System Description	Hot Restrike
Cap-Base	G38
Cap-Base Information	-
Execution	-
Operating Position	any
Main Application	Indoor & Outdoor filming
Life to 50% failures	500 hr
EM	

• Light Technical Characteristics

Color Code	-
Color Rendering Index	95 Ra8
Color Temperature	6000 K
Color Temperature Technical	5870 K
Chromaticity Coordinate X	323 -
Chromaticity Coordinate Y	328 -
Luminous Flux Lamp EM	210000 (min), 240000 (nom) Lm
Luminous Efficacy Lamp EM	96 Lm/W

• Electrical Characteristics

Watts	2500 W
Lamp Wattage Technical	2500 W

Lamp Current	25.6 A
Ignition Supply Voltage	207 (min) V
Dimmable	Yes

• Luminaire Design Requirements

Pinch Temperature	450 (max) C
Bulb Temperature	700 (max) C

• Product Dimensions

Overall Length C	240 (max) mm
Diameter D	60 (max) mm
Width F	63 (min), 65 (nom), 67 (max) mm
Light Center Length L	126 (min), 127 (nom), 128 (max) mm
Arc Length O	14.0 mm

• Product Data


Product number	245811
Full product name	MSR 2500 HR 1CT
Short product name	MSR 2500 HR 1CT/2
Pieces per Sku	1
eop_pck_cfg	2
Skus/Case	2
Bar code on pack	8727900926040
Bar code on case	8727900926057
Logistics code(s)	928104905114
eop_net_weight_pp	0.305 kg



PHILIPS


sense and simplicity

Dimensional drawing

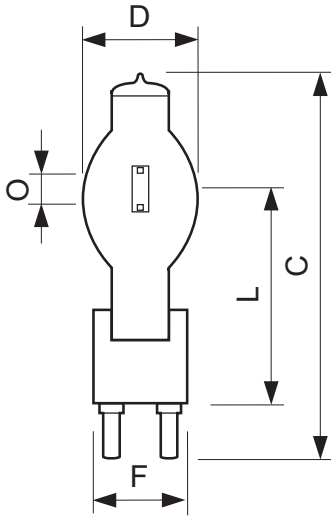



MSR 2500 HR, MSR 4000 HR

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR 2500 HR	-	-	-	240	60	-	63	65	67	126	127	128	14.0



G38

Photometric data

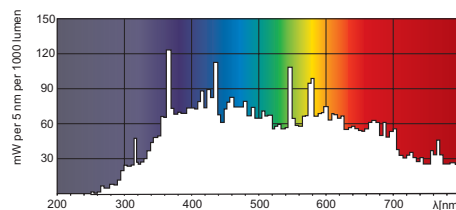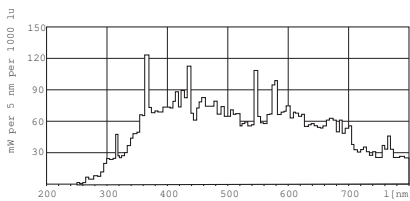

MSR 125, 200, 250, 400, 575, 1200 (C), 2500, 4000, 6000, 12000, 18000 HR MSR 125, 200, 250, 400, 575, 1200 (C), 2500, 4000, 6000, 12000, 18000 HR



© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, April 13
data subject to change