

Halogen non-reflector

BRL/BCD 50W 12V



Halogen non-reflector lamps offer high-quality light and are easy to install, replace and operate. All halogen non-reflector lamps incorporate a distortion-free quartz bulb and a precise positioning of the mounted filament. These ensure optimal beam performance and consistent, high light output. A wide range of wattages is available for a broad variety of applications, including projection systems. In addition you get all the proven advantages of halogen technology such as a full spectrum and a color rendering index (CRI) of 100 – the same as natural light and the best that it can be. Halogen lamps also create a comfortable warm white light, and they maintain their lumen output, with almost no reduction, throughout their lifetime.

Product data

• General Characteristics

Philips Code	7027
ANSI Code	BRL/BCD
LIF Code	A1/220
Cap-Base	G6.35
Bulb Material	Quartz-UV Open
Filament Shape	Flat
Operating Position	s90
Main Application	Projection
Life to 50% failures	50 hr

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature Technical	3300 K
Luminous Flux Lamp	1500 Lm

• Electrical Characteristics

Watts	50 W
Voltage	12 V

• Luminaire Design Requirements

Pinch Temperature	400 (max) C
-------------------	-------------

Bulb Temperature	900 (max) C
------------------	-------------

• Product Dimensions


Diameter D	11.5 (max) mm
Light Center Length L	29.75 (min), 30 (nom), 30.25 (max) mm
Pin Diameter P	0.95 (min), 1 (nom), 1.05 (max) mm
Filament Dimensions (WxH) [mm]	3.3x1.6

• Product Data

Product number	316273
Full product name	7027 50W G6.35 12V 1CT
Short product name	7027 50W G6.35 12V 1CT/10X10F
Pieces per Sku	1
eop_pck_cfg	10X10F
Skus/Case	100
Bar code on pack	8711500409829
Bar code on intermediate pack	8711500420039
Bar code on case	8711500423245
Logistics code(s)	923870217103
eop_net_weight_pp	2.350 gr



Dimensional drawing

Dimensional drawing

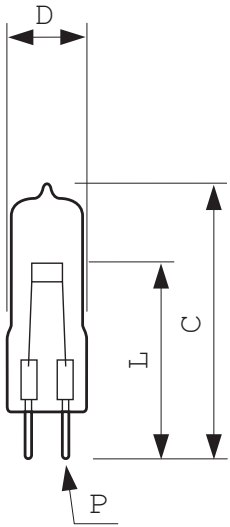

G6.35, GY6.35

Product	C (Norm)	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	P (Min)	P (Norm)	P (Max)
7027 50W G6.35 12V	-	-	11.5	29.75	30	30.25	0.95	1	1.05



G6.35



© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, April 11
data subject to change