

# HPL

7007/LL 575W 115V 1CT



HPL lamps include a barrel-shaped filament that is approved by ETC for use in its Source Four™ fixtures. Bright, high quality light and high beam intensity is assured by the optimal filament design, while the unique P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which extends lifetime and consistency of high-quality light output, resulting in fewer early failures and fewer maintenance man hour costs.

## Product data

### • General Characteristics

Philips Code	7007/LL
System Description	P3 Technology
Cap-Base	Heat Sink
Cap-Base Information	Heat Sink
Bulb Finish	Clear
Filament Shape	Bi-Plane
Operating Position	any
Main Application	Entertainment
Life to 50% failures	2000 hr

### • Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature Technical	3000 K
Luminous Flux Lamp	12360 Lm

### • Electrical Characteristics

Watts	575 W
Voltage	115 V
Dimmable	Yes
Rapid Acting HBC	10 V
Fuse	

### • Luminaire Design Requirements

Pinch Temperature	480 (max) C
-------------------	-------------

### • Product Dimensions


Overall Length C	104 (max) mm
Diameter D	19 (max) mm
Light Center Length L	60.3 mm
Filament Dimensions (WxH) [mm]	6.0x11.0x6.0
Filament Height H	11 mm
Filament Length W	6 mm
Filament Depth D1	6 mm

### • Product Data

Product number	391672
Full product name	7007/LL 575W Heat Sink 115V 1CT
Short product name	7007/LL 575W Heat Sink 115V 1CT/10
Pieces per Sku	1
eop_pck_cfg	10
Skus/Case	10
Bar code on pack	8711500185341
Bar code on case	8711500185433
Logistics code(s)	924555034428
eop_net_weight_pp	0.051 kg

## Dimensional drawing

Dimensional drawing

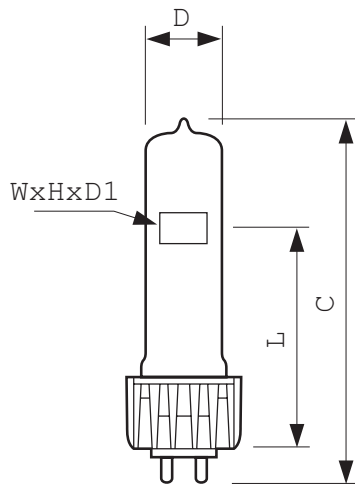

HPL

Product	C (Max)	D (Max)	D1 (Norm)	H (Norm)	L (Norm)	W (Norm)
7007/LL 575W Heat Sink 115V	104	19	6	11	60.3	6



© 2012 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2012, April 16  
data subject to change