



Philips Energy Advantage  
T8 Lamps featuring  
ALTO II™ Technology

*Ideal for applications  
requiring maximum  
energy savings*

T8 COLLECTION

Alto II™



**ALTO II™ means 50%  
less mercury than the  
original ALTO T8 lamps†**

† Original 2', 3' and 4' T8 lamps featuring ALTO® Lamp Technology had 3.5mg of mercury; New 2', 3' and 4' T8 lamps featuring ALTO II™ Technology have 1.7mg of mercury.

## Energy savings, extra low mercury

Philips Energy Advantage T8 lamps offer high energy savings in an environmentally responsible lamp.

### Outstanding energy savings

- Save 7 watts per lamp instantly when compared to a 32W T8 lamp
- Save \$21 in energy costs over the rated average life of the lamp\*
- Operates on any Instant Start and Programmed Start Ballast‡

### Extended life

- Reduce maintenance costs by extending the relamping cycle
- Warranty period: 30 months

### Better for the environment

- Only 1.7mg of mercury with ALTO II™ Technology
- Reduced impact on the environment without sacrificing performance

(\*; ‡ See back of page for footnotes)

**PHILIPS**

sense and simplicity

# Philips Energy Advantage T8 Lamps featuring ALTO II™ Technology


## Ordering, Electrical and Technical Data

| Product Number | Ordering Code         | Watts | Pack. Qty. | Color Temp. (Kelvin) | Nom. Length (In.) | Rated Average Life (hrs) <sup>1</sup> |                      | Approx. Initial Lumens <sup>2</sup> | Design Lumens <sup>3</sup> | CRI | Lumen Maint. |
|----------------|-----------------------|-------|------------|----------------------|-------------------|---------------------------------------|----------------------|-------------------------------------|----------------------------|-----|--------------|
|                |                       |       |            |                      |                   | 12-hr on Ins. Start                   | 12-hr on Prog. Start |                                     |                            |     |              |
| 13781-0        | F32T8/ADV830/XEW/ALTO | 25    | 25         | 3000                 | 48                | 30,000                                | 36,000               | 2500                                | 2425                       | 85  | 97%          |
| 13782-8        | F32T8/ADV835/XEW/ALTO | 25    | 25         | 3500                 | 48                | 30,000                                | 36,000               | 2500                                | 2425                       | 85  | 97%          |
| 13783-6        | F32T8/ADV841/XEW/ALTO | 25    | 25         | 4100                 | 48                | 30,000                                | 36,000               | 2500                                | 2425                       | 85  | 97%          |
| 13784-4        | F32T8/ADV850/XEW/ALTO | 25    | 25         | 5000                 | 48                | 30,000                                | 36,000               | 2400                                | 2330                       | 85  | 97%          |
| 14732-2        | F32T8/ADV830/EW/ALTO  | 28    | 25         | 3000                 | 48                | 30,000                                | 36,000               | 2725                                | 2645                       | 85  | 97%          |
| 14733-0        | F32T8/ADV835/EW/ALTO  | 28    | 25         | 3500                 | 48                | 30,000                                | 36,000               | 2725                                | 2645                       | 85  | 97%          |
| 14734-8        | F32T8/ADV841/EW/ALTO  | 28    | 25         | 4100                 | 48                | 30,000                                | 36,000               | 2725                                | 2645                       | 85  | 97%          |
| 14735-5        | F32T8/ADV850/EW/ALTO  | 28    | 25         | 5000                 | 48                | 30,000                                | 36,000               | 2675                                | 2595                       | 85  | 97%          |
| 14771-0        | F32T8/ADV830/EW/ALTO  | 30    | 25         | 3000                 | 48                | 30,000                                | 36,000               | 2850                                | 2765                       | 85  | 97%          |
| 14772-8        | F32T8/ADV835/EW/ALTO  | 30    | 25         | 3500                 | 48                | 30,000                                | 36,000               | 2850                                | 2765                       | 85  | 97%          |
| 14773-6        | F32T8/ADV841/EW/ALTO  | 30    | 25         | 4100                 | 48                | 30,000                                | 36,000               | 2850                                | 2765                       | 85  | 97%          |
| 14774-4        | F32T8/ADV850/EW/ALTO  | 30    | 25         | 5000                 | 48                | 30,000                                | 36,000               | 2800                                | 2715                       | 85  | 97%          |

- 1) Average life under engineering data with lamps turned off and restarted once every 12 operating hours.
  - 2) Approximate initial lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life, when the output is measured during operation on a reference ballast under standard laboratory conditions. For expected lamp lumen output, commercial ballast manufacturers can advise the appropriate ballast factor for each of their ballasts when they are informed of the designated lamp. The ballast factor is a multiplier applied to the designated lamp lumen output.
  - 3) Design lumens are the approximate lamp lumen output at 40% of the lamp's rated average life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions.
- Ⓢ Lamp meets US Federal Minimum Efficiency Standards.
  - This lamp is better for the environment because of its reduced mercury content. All Philips ALTO II™ lamps give you end-of-life options which can simplify and reduce your lamp disposal costs depending on your state and local regulations.


### 97% Lumen Maintenance

#### Philips Energy Advantage T8 Lamps

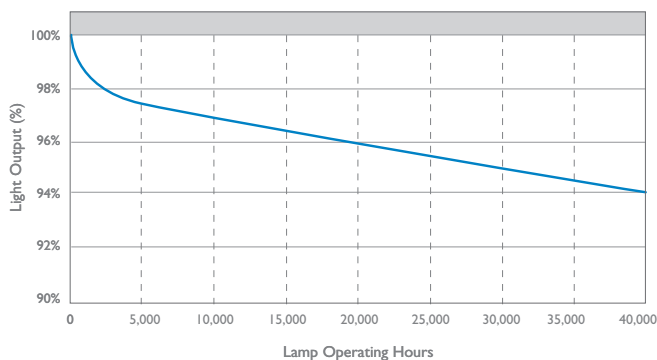

### Rated Average Life

#### Philips Energy Advantage T8 Lamps

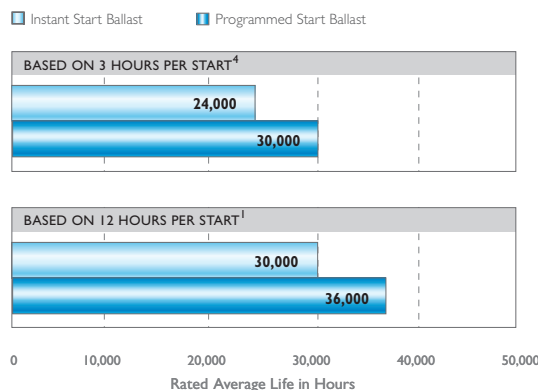

4) Average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Lamp life is appreciably longer if lamps are started less frequently.

#### Footnotes from front page:

\* Based on wattage savings (7w) x rated average life (30,000 hours) x kWh rate (\$.10).

‡ Starting voltage should be equal to or greater than 550V. These lamps are not recommended for use where the temperature in fixture is below 70°F. Striations may occur where air movement is present in fixture. For best operation, use ballast with anti-striation circuitry.



Specifications are subject to change without notice.  
 © 2007 Philips Lighting Company. All rights reserved.  
 Printed in USA 06/07  
 P-5782-B  
[www.philips.com](http://www.philips.com)

Philips Lighting Company  
 200 Franklin Square Drive  
 P.O. Box 6800  
 Somerset, NJ 08875-6800  
 1-800-555-0050  
 A Division of Philips Electronics North America Corporation

Philips Lighting  
 281 Hillmount Road  
 Markham, Ontario  
 Canada L6C 2S3  
 1-800-555-0050  
 A Division of Philips Electronics Ltd.

Printed on chlorine free paper from Sappi Fine Paper mills, who are accredited with EMAS environmental certification. Sappi claims that the pulp used in the manufacture of Magno Dull paper is derived from environmentally certified forests.