

7/9/11/15 WATT A-TYPE CFL BULBS

Satco's Eco - Friendly Compact Fluorescent Lamps
A smarter choice for a brighter future

- Compact Size
- 7W / 9W / 11W & 15W Available
- Offered in 2700K, 4100K & 5000K
- Long Life - Up to 10,000 Hours

SOFT WHITE	BRIGHT WHITE	NATURAL LIGHT
2700K	4100K	5000K
<ul style="list-style-type: none"> • Living Areas • Bedrooms • Dining Spaces 	<ul style="list-style-type: none"> • Office Use • Work Areas • General Lighting 	<ul style="list-style-type: none"> • Reading • Display Use • Show Color Accurately



7/9/11/15 Watt A-Type CFL Bulbs – E26 Medium Base


Item No.	Watt	Replace Incandescent	Lumens	CCT	Life/ Hrs.	M.O.D.(Inches)	M.O.L.(Inches)	ES	CUFT.	Unit UPC	Case UPC
S7281	7	40W	400	2700K	10000	2.13	4.25	Y	1.07	045923072819	10045923072816
S7282	7	40W	400	4100K	10000	2.13	4.25	N	1.07	045923072826	10045923072823
S7283	7	40W	400	5000K	10000	2.13	4.25	N	1.07	045923072833	10045923072830
S7284	9	40W	450	2700K	6000	2.44	4.61	Y	1.46	045923072840	10045923072847
S7285	9	40W	450	4100K	10000	2.44	4.61	N	1.46	045923072857	10045923072854
S7286	9	40W	450	5000K	10000	2.44	4.61	N	1.46	045923072864	10045923072861
S7287	11	40W	540	2700K	10000	2.44	4.96	Y	1.54	045923072871	10045923072878
S7288	11	40W	540	4100K	10000	2.44	4.96	N	1.54	045923072888	10045923072885
S7289	11	40W	540	5000K	10000	2.44	4.96	N	1.54	045923072895	10045923072892
S7291	15	60W	780	2700K	10000	2.64	5.39	Y	1.86	045923072918	10045923072915
S7292	15	60W	780	4100K	10000	2.64	5.39	N	1.86	045923072925	10045923072922
S7293	15	60W	780	5000K	10000	2.64	5.39	N	1.86	045923072932	10045923072939

Pack Type: Box / Inner Pack 12 / Master Pack 48



Features and Benefits

- Long life – up to 10,000 hours
- Amalgam technology insures higher lumen performance
- All lamps offered in 2700K/4100K/5000K
- Four color retail boxed package

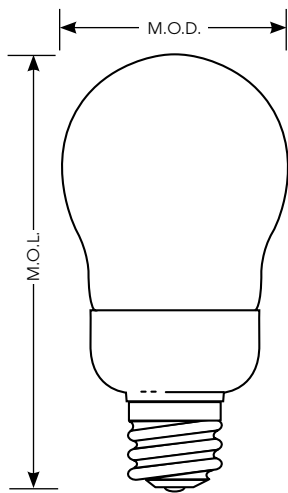

Specifications (At full light output)

Ballast Type.....	Electronic
Starting Method.....	Rapid Start
Input Line Frequency.....	50/60HZ
Input Line Voltage.....	120VAC
Color Rendering Index.....	>80
Minimum Starting Temperature.....	0° F
Maximum Operating Temperature.....	122° F
Lamp Operating Frequency.....	>40HZ
Lamp Current Crest Factor.....	<1.70
Power Factor.....	>.50
Total Harmonic Distortion.....	<150%
U.L./ C.U.L Listed.....	Yes
FCC Compliance.....	Part18

M.O.D. = Maximum Overall Diameter
M.O.L. = Maximum Overall Length

SATCO® National Toll-Free:
1-800-43-SATCO (1-800-437-2826)

Visit Our Web Site at: www.satco.com

EXECUTIVE OFFICES & WAREHOUSE; NEY YORK, 110 Heartland Blvd., Brentwood, NY 11717 • 800-437-2826 • (631) 243-2022 • FAX (631) 243-2027
 FLORIDA, 900 N.W. 159th Drive, Miami, Fl 33169 • 800-437-2826 • (305) 624-2044 • FAX (305) 623-0286
 TEXAS, 2000 Valwood Parkway, Farmers Branch, TX 75234 • 800-437-2826 • (972) 247-2437 • FAX (972) 247-5408
 CALIFORNIA, 31288 San Benito St., Hayward, CA 94544 • 800-437-2826 • (510) 487-4822 • FAX 9510) 487-8955
 WASHINGTON, 4710 116th St. S.W., Mukilteo, WA 98275 • 800-437-2826 • (425) 789-3300 • FAX (425) 789-3310
 PUERTO RICO, Bldg 3, Campeche St. 23 Julio N. Matos Industrial Park • Bo Martin Gonzales Carolina, PR 00984 • (787) 757-3510 • FAX (787) 757-3540