




Capsule Lamps T-20, T-24 Series Specifications


One Piece Compact Fluorescent Decorative Capsule

- NPF, 8,000 Hours average rated life

Item #	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (Inches)	Diameter (Inches)	Base
1T2004	4	25	250	.07A	4.75	2.50	Medium
1T2009	9	40	495	.15A	5.00	2.50	Medium
1T2014	14	60	800	.23A	5.35	2.50	Medium
1T2409	9	40	495	.15A	5.24	2.80	Medium
1T2414	14	60	800	.23A	5.24	2.80	Medium
1T2419	19	75	950	.32A	5.63	2.80	Medium
1T2423	23	100	1400	.38A	6.15	2.80	Medium




SpringLamp
Inside!

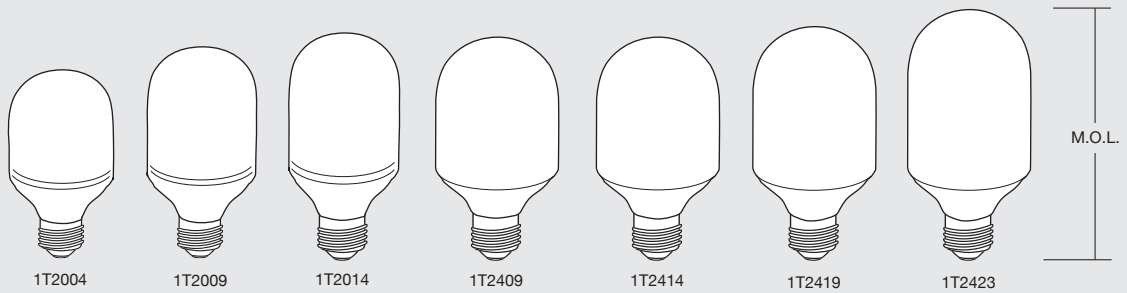

Applications:

- Use anywhere a standard incandescent is used

Perfect for:

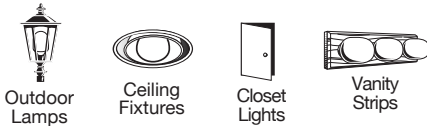

Special Application Options: (Ordering Suffix)

- 3100°K (31K), 3500°K (35K), 4100°K (41K),
5100°K (51K), 6500°K (65K)

Features and Benefits

- Long life, 8,000 hour average rated life
- Lasts 4 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance costs for lamp replacements
- 2700°K color temperature closest to incandescent light
- Quick run-up time
- Medium base and compact height fits anywhere a standard incandescent fits
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance

Specifications (at full brightness)

End of Life Protection-----	Yes
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	60HZ
Lamp Life (rated) -----	8,000 Hours
Color Temperature -----	2700°K
Color Rendering Index -----	84
Min. Starting Temperature -----	-20 ° F
Max. Operating Temperature --	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency ---	45 KHZ
Lamp Current Crest Factor ----	< 1.60
Max. Open Circuit Voltage -----	600V
Power Factor -----	> .50
Total Harmonic Distortion -----	< 150%



ISO 9002
CERTIFIED

12 MONTH
WARRANTY