


SL035 Instructions

CAUTION - IMPORTANT SAFETY NOTE

This lamp has a polarized plug (one blade is wider than the other) to reduce the risk of electrical shock. *This plug will fit in a polarized outlet only one way.* If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a certified electrician. *Never use with an extension cord unless plug can be fully inserted.* Do not alter the plug.

TO SECURE LAMP HEAD TO TRIPOD:

Place bolt through hole in bracket at top of tripod and through hole in base of lamp head. Place a 1/4-inch (6mm) lock washer on bolt. Screw on wing nut and tighten until secure.

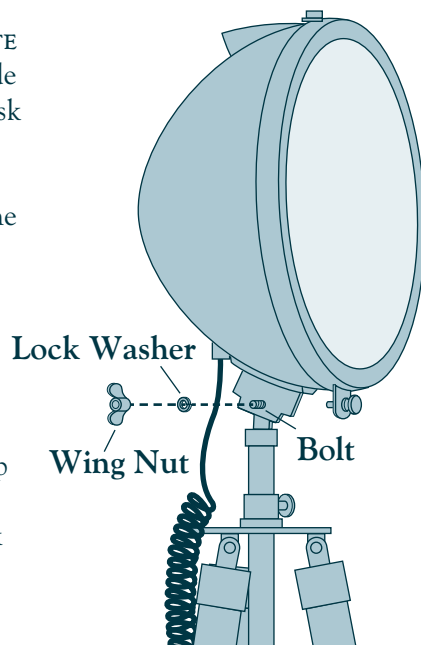

TO CHANGE THE LIGHT BULB:

Unscrew screw at top and screw cap at bottom of metal ring on lamp front. Remove metal ring and glass. Screw light bulb into holder inside lamp. Replace glass and metal ring on lamp front and secure with screws.

Note: Bulb wattage *should not exceed 60 watts.*

Warning: Lamp will get hot when in use.

The Netherlands
AMNL
Ambachtsweg 37
NL-3899 AM
Zeewolde

United States
AM USA
888 Garfield
P.O. Box 21710
Eugene, OR 97402

