




PRODUCT SPECIFICATION BULLETIN
Catalog Number 0004C
DKCS-24(CBB65,540V)


Rated Voltage	540V ~
Rated frequency	50/60Hz
Rated capacitance	24 μ F
Capacitance tolerance	$\pm 3\%$
Dissipation factor	≤ 0.006 (100Hz)
AC test voltage	a) T-T : 2Un/60s b) T-C : 2.5KV/60s (50Hz或60Hz)
Rated minimum and maximum temperatures	-40/105 $^{\circ}$ C
Altitude	≤ 3000 m
Type	B
	oil-type capacitor
Leads	600V/150 $^{\circ}$ C/VLPE/18AWG
Case material	aluminium
Mounting screw	M8
Carton Dimension	453x292x184mm
Carton Quantity	28PCS
N.W.	6.5KG
G.W.	7.5KG

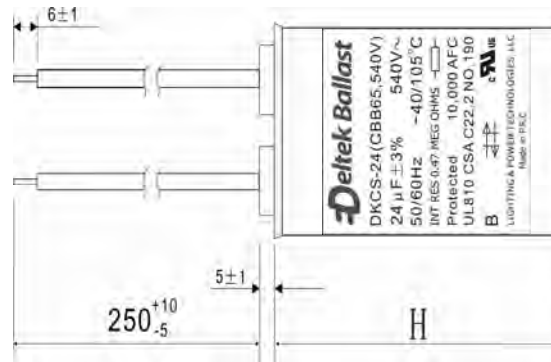

7101 Whisperfield Dr. Plano, TX 75024
 PH: 972-624-5000 Fax: 972 624-580C
 Tech Support: 877 666-5267
 sales@lightingandpowertech.com
 www.lightingandpowertech.com



TIN
)

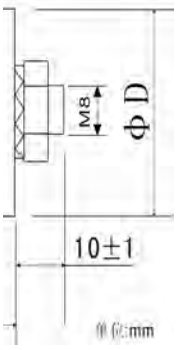

± 1

± 2

wer
L L C

†
)

