


Rated Voltage	540V ~
Rated frequency	50/60Hz
Rated capacitance	26μF
Capacitance tolerance	±3%
Dissipation factor	≤0.006 (100Hz)
AC test voltage	a) T-T : 2Un/60s b) T-C :2.5KV/60s (50Hz或60Hz)
Rated minimum and maximum temperatures	-40/105°C
Altitude	≤3000m
Type	B
	oil-type capacitor
Leads	600V/150°C/VLPE/18AWG
Case material	aluminium
Mounting screw	M8
Carton Dimension	453x292x184mm
Carton Quantity	28PCS
N.W.	7.5KG
G.W.	8.5KG




Lighting and Po
Technologies

7101 Whisperfield Dr. Plano, TX 75024
 PH: 972-624-5000 Fax: 972 624-580C
 Tech Support: 877 666-5267
 sales@lightingandpowertech.com
 www.lightingandpowertech.com

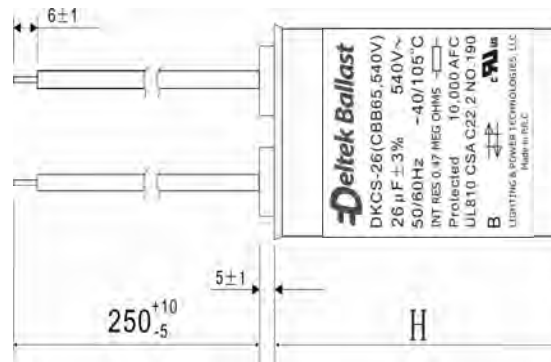

TIN

I



± 1

± 2

wer

L L C

+

)

