



# TECHNICAL BULLETIN HIGH PRESSURE SODIUM

## EYE HORTILUX™ SUPER HPS LU250S/HTL/EN

ANSI Code: S50

Product Code: 66640

**Features:**



- EPA TCLP compliant for non-hazardous waste
- Dependable long life
- Universal burning position



*Environmentally Friendly-*  
Reduced Mercury and 100% lead free!

### PERFORMANCE DATA


Initial lumens at rated watts after 100 hours operation	30500	Lm
Mean lumens at 10 hours/start	27000	Lm
Rated average life	24000	H
Warm up time (90% lumens)	5	Min
Correlated color temperature	2100	K
CIE chromaticity	.526,.421	X, Y
Color rendering index	23	
Operating Position	Any	
Hot Re-strike time	15	Min

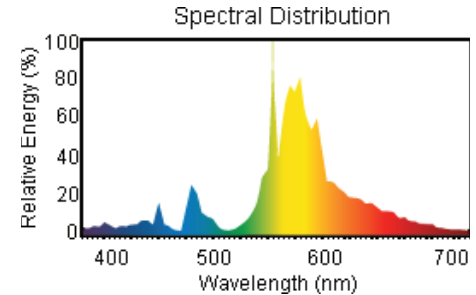

### ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	250	W
Nominal lamp voltage	100	V
Nominal lamp current	3.0	A <sub>rms</sub>
Current crest factor (max.)	1.8	
Max. starting current	4.5	A <sub>rms</sub>
Min. starting current	3.0	A <sub>rms</sub>
Ballast requirements	Use with ballast rated for S50 lamps	
<b>OPEN CIRCUIT VOLTAGE</b>		
-40°C (-40°F)	169 (235)	V <sub>rms</sub>
Lampholder rating	4	kV
<b>IGNITOR REQUIREMENTS</b>		
Min. Pulse Height	2.5	kv
Max. Pulse Height	4.0	kv
Min. Pulse Width	1@2250	µsec@V


### LAMP MORTALITY

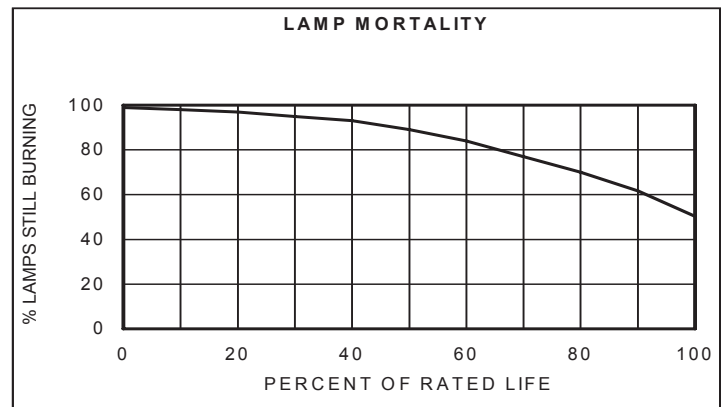

### PHYSICAL DESCRIPTION

Maximum overall length	248 (9.764)	mm (in)
Light center length	146 (5.748)	mm (in)
Bulb diameter	57 (2.244)	mm (in)
Base to bulb eccentricity (max.)	3	Degrees
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	ET18	
Bulb material	Borosilicate (Hard Glass)	
Arc tube material	PCA	
Arc length	64 (2.52)	mm (in)
Bulb finish	Clear	
Base designation	Mogul (E39)	
EPA TCLP Compliant	Yes	

### LUMEN MAINTENANCE

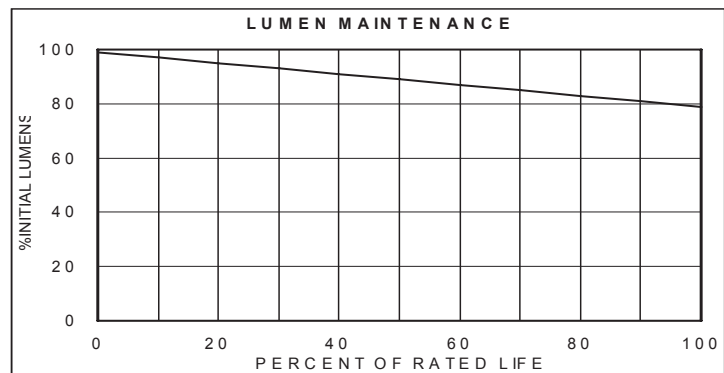

ISO 9001:2008 Certified    ISO 14001:2004 Certified  
**EYE LIGHTING INTERNATIONAL**  
**OF NORTH AMERICA, INC.**  
 A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

OSHAS 18001:2007 Certified    ISO 17025:2005 Accredited  
 Address: 9150 Hendricks Rd., Mentor, OH 44060  
 Phone: 888-665-2677 Fax: 800-811-7395 E-mail:sales@eyehortilux.com  
 Phone: (440) 350-7000 Fax: (440) 350-7001 Web: [www.eyehortilux.com](http://www.eyehortilux.com)



**⚠ WARNING**

**RISK OF ELECTRIC SHOCK:**

- Turn power off before inspection, installation or removal.
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock.

**RISK OF FIRE:**

- Keep combustible materials away from lamp during operation.

**UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE OR PROPERTY DAMAGE**

- Do not exceed rated ballast voltage.
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life.
- Do not turn on lamp until fully installed.
- Use only with fixture and ballast rated for this product.
- Electrically insulate any metal to glass support in fixture.

**⚠ CAUTION**

**RISK OF BURN:**

- Allow lamp to cool before handling.
- Contains sodium – Avoid skin contact with broken pieces.

**LAMP MAY SHATTER AND CAUSE INJURY IF BROKEN**

- Do not use excessive force when installing lamp.
- Dispose of lamp in an enclosed container.
- Wear safety glasses and gloves when installing lamp.

**Hg-LAMP CONTAINS MERCURY**  
Manage in Accord with Disposal Laws  
See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-888-665-2677

