


**BENITO™**

# FP8003\*\* Ceiling Fan

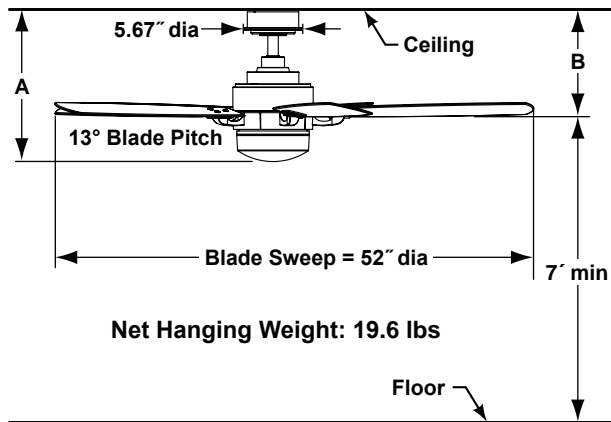

	A	B
Fan w/4.5" downrod	16.50"	11.42"
Fan w/12" downrod	24.00"	18.92"
Fan w/18" downrod	30.00"	24.92"
Fan w/24" downrod	36.00"	30.92"
Fan w/36" downrod	48.00"	42.92"
Fan w/48" downrod	60.00"	54.92"
Fan w/60" downrod	72.00"	66.92"
Fan w/72" downrod	84.00"	78.92"

### Available Finishes

OB	Oil-Rubbed Bronze with Opal Frosted Glass
PN	Polished Nickel with Opal Frosted Glass
SN	Satin Nickel with Opal Frosted Glass

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	157	4774	80	0.50	60
Med	95	2775	111	0.39	25
Low	60	1587	139	0.29	11

### INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

### BLADE SETS:

A set of five 21.5" reversible wood blades is included. Mahogany/Walnut included with Oil-Rubbed Bronze fan and Cherry/Walnut included with Polished Nickel and Satin Nickel fans.

### CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 wall control, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

### DOWNROD OPTIONS:


Fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Benito™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

### LOCATION USE:

Fan is rated for dry locations only.

**BENITO™**

# FP8003\*\* Ceiling Fan

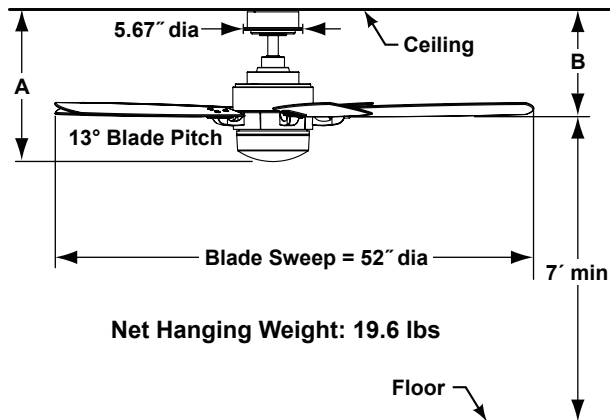

	A	B
Fan w/4.5" downrod	16.50"	11.42"
Fan w/12" downrod	24.00"	18.92"
Fan w/18" downrod	30.00"	24.92"
Fan w/24" downrod	36.00"	30.92"
Fan w/36" downrod	48.00"	42.92"
Fan w/48" downrod	60.00"	54.92"
Fan w/60" downrod	72.00"	66.92"
Fan w/72" downrod	84.00"	78.92"

### Available Finishes

OB	Oil-Rubbed Bronze with Opal Frosted Glass
PN	Polished Nickel with Opal Frosted Glass
SN	Satin Nickel with Opal Frosted Glass

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	157	4774	80	0.50	60
Med	95	2775	111	0.39	25
Low	60	1587	139	0.29	11

### INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

### BLADE SETS:

A set of five 21.5" reversible wood blades is included. Mahogany/Walnut included with Oil-Rubbed Bronze fan and Cherry/Walnut included with Polished Nickel and Satin Nickel fans.

### CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 wall control, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

### DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Benito™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

### LOCATION USE:

Fan is rated for dry locations only.