

LONG LASTING
ECO FRIENDLY
 energy efficient
durable
ILLUMINATING
 lighting solutions
 LED light emitting diode
 easy installation
 sustainable
HIGH BRIGHTNESS
 solid state lighting

LED T8 tube - 4FT



MODELS

CCT	
6000	MT8N09
4100	MT8W09

PERFORMANCE & PARAMETERS

CCT	4100 / 6000	K
Luminous Flux	1600 / 1800	Lm
Beam Angle	120 ° / 120 °	Deg
CRI	≥ 82 / ≥ 82	Ra
Efficacy	84 / 95	Lm/W
Rated Average Life	30,000	H
Florescent Equivalent	32	W
Input Voltage	100 - 277	V
Input Power	19	W
Input Current	.35	A
Power Frequency	50 - 60	Hz
Power Tolerance	± 10	%



PALM SERIES

FOREST LIGHTING





LED T8 tube - 4FT

ENVIRONMENT

Body Length 1198 mm (47.16")
Body Parameter 26mm x 30mm (1.02" x 1.18")
Net Weight 355g (12.52 oz.)

Parameter	Value	Unit
Operating Temperature	-68 to +140	°F
Operating Humidity	10 to 85	%RH
Operating Frequency	≥ 120	Hz
Base	G13	

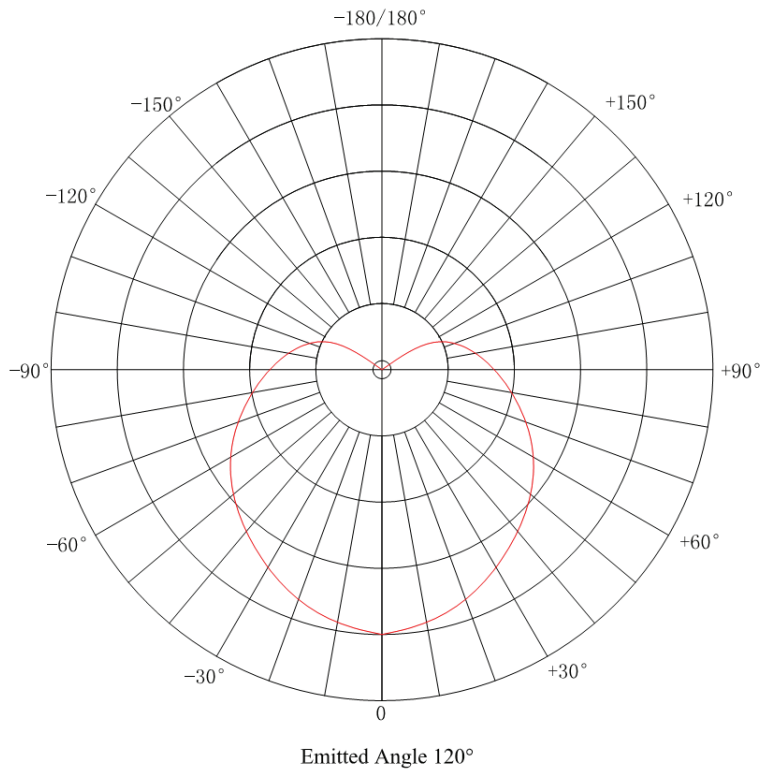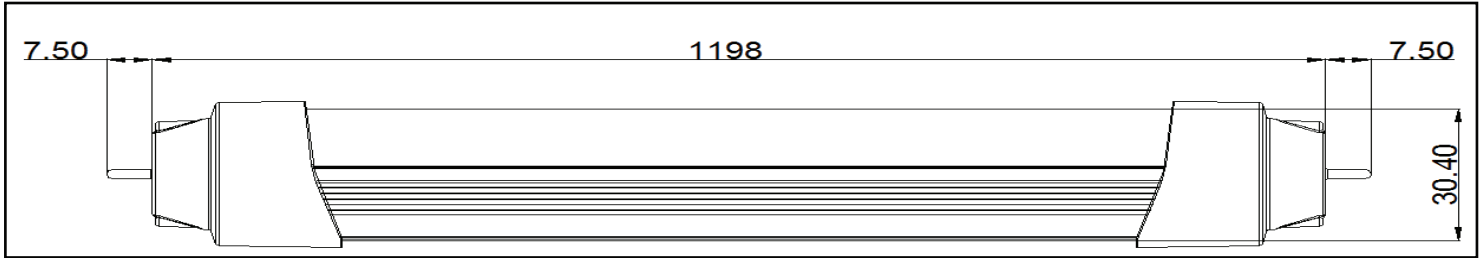

FOREST LIGHTING

