



# Specification Sheet :FLPL50 SERIES

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Model No.: \_\_\_\_\_

Remarks: \_\_\_\_\_

## Specifications:

NO additional electrical or mechanical source required  
 Before installation it must be determined that there is a minimum of 5 Fc of fluorescent light on the face(s) of the sign at all times during building occupancy.

Approvals:  
 Meets NFPA Life Safety Code 101 and OSHA  
 Meets International Building and Fire Codes  
 Listed through UL 924 for the USA and Canada  
 Listed with the State of California State Fire Marshal


## Listings & Certifications:



## Model: FLPL50



## Mechanical Data:

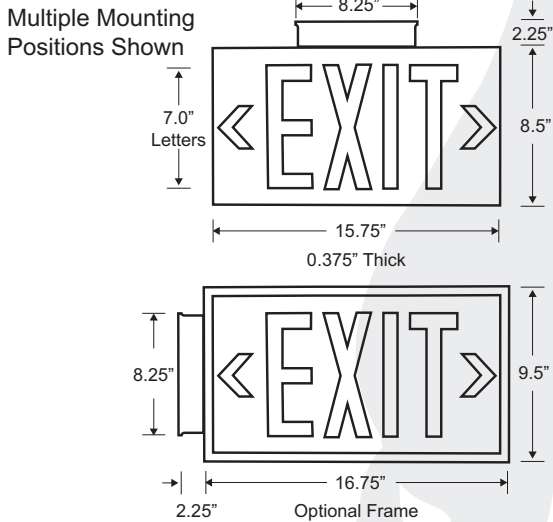

## Standard Features:

- High Illumination Non-Electric Photoluminescent Technology
- Long Life Corrosion-Proof Construction (20 Yrs. Est.)
- High Visibility In Total Darkness And Smoke Filled Conditions
- Suitable For Floor Proximity Installation
- 50 Ft Viewing Distance
- Field Applied Directional Chevrons
- Aluminum Construction With Photoluminescent Lettering
- LEED Points Qualified
- No Energy Consumption
- Non-Toxic, Non-Radioactive
- Designed For Surface, Flag And Ceiling Mount
- Thin, Low Profile Construction
- Consistent, Uniform Illumination
- Can Be Used For Both High Level And Low Level Applications
- Tested And Approved For Low Impact
- Requires Virtually No Maintenance – No Bulbs, No Battery
- Replacement Can Be Relocated If Path Of Egress Changes
- Both High And Low Location Approved

## Ordering Information:

Base Model No.	Number of Faces	Background Color	Frame Color	
FLPL50	S - Single	R - Red	B - Black	
		G - Green	R - Red	
		B - Black	G - Green	
	D - Dual	SR - Brushed Aluminum w/ Red Letter Outline	S - Silver Powder Coat	
		SG - Brushed Aluminum w/ Green Letter Outline	W - White	
			Blank - No Frame	

Build part number by adding Base Model No., one of each Number of Faces, Background Color and Frame Color.  
 Example: FLPL50-D-SR-R

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**



# Specification Sheet :FLPL50 SERIES

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Model No.: \_\_\_\_\_

Remarks: \_\_\_\_\_

## Specifications:

NO additional electrical or mechanical source required  
 Before installation it must be determined that there is a minimum of 5 Fc of fluorescent light on the face(s) of the sign at all times during building occupancy.

Approvals:  
 Meets NFPA Life Safety Code 101 and OSHA  
 Meets International Building and Fire Codes  
 Listed through UL 924 for the USA and Canada  
 Listed with the State of California State Fire Marshal


## Listings & Certifications:



## Model: FLPL50



## Mechanical Data:

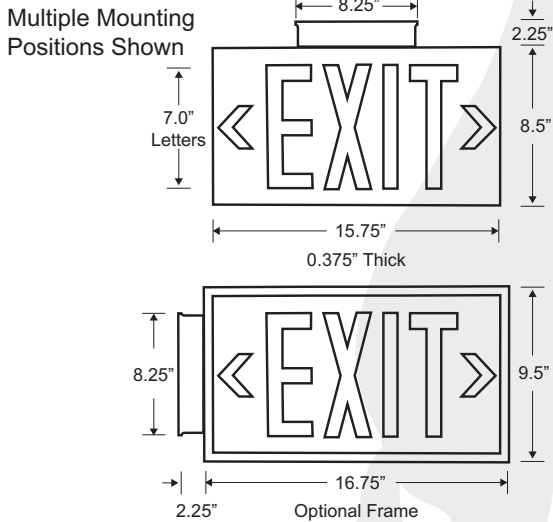

## Standard Features:

- High Illumination Non-Electric Photoluminescent Technology
- Long Life Corrosion-Proof Construction (20 Yrs. Est.)
- High Visibility In Total Darkness And Smoke Filled Conditions
- Suitable For Floor Proximity Installation
- 50 Ft Viewing Distance
- Field Applied Directional Chevrons
- Aluminum Construction With Photoluminescent Lettering
- LEED Points Qualified
- No Energy Consumption
- Non-Toxic, Non-Radioactive
- Designed For Surface, Flag And Ceiling Mount
- Thin, Low Profile Construction
- Consistent, Uniform Illumination
- Can Be Used For Both High Level And Low Level Applications
- Tested And Approved For Low Impact
- Requires Virtually No Maintenance – No Bulbs, No Battery
- Replacement Can Be Relocated If Path Of Egress Changes
- Both High And Low Location Approved

## Ordering Information:

Base Model No.	Number of Faces	Background Color	Frame Color	
FLPL50	S - Single	R - Red	B - Black	
		G - Green	R - Red	
		B - Black	G - Green	
	D - Dual	SR - Brushed Aluminum w/ Red Letter Outline	S - Silver Powder Coat	
		SG - Brushed Aluminum w/ Green Letter Outline	W - White	
			Blank - No Frame	

Build part number by adding Base Model No., one of each Number of Faces, Background Color and Frame Color.  
 Example: FLPL50-D-SR-R

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**