

Specifications:

Lamp Type	LED	
Lamp Wattage	Red	120VAC, 60Hz, 0.031A, 3.2W
		277VAC, 60Hz, 0.010A, 3.6W
	Green	120VAC, 60Hz, 0.033A, 3.8W
		277VAC, 60Hz, 0.017A, 4.4W
Emergency Operation	90 minutes	


Listings & Certifications:



Model: FHEX21



Mechanical Data:

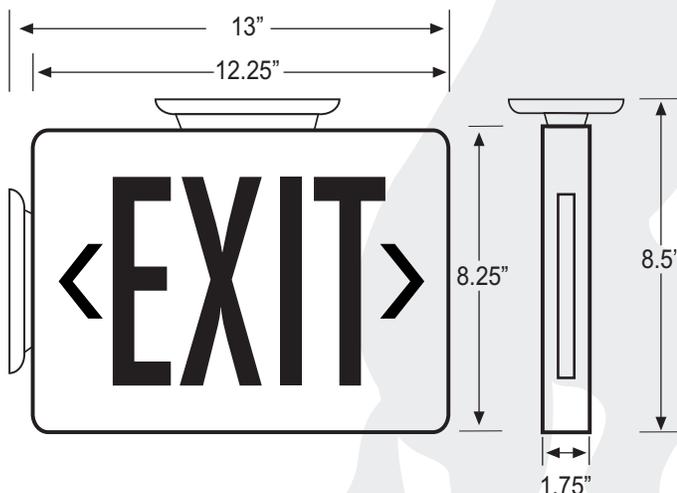

Multiple mounting options shown.

Standard Features:

- Push-to-test Switch
- LED Charge Indicator
- Maintenance Free, 6V Sealed Lead-Acid Battery
- Dual Voltage 120V/277V
- Specification Grade Design
- Universal Mount
- Long Life Energy Saving LED light source
- Field replaceable snap out/in chevron directional indicator.
- Snap-fit faceplate installs without use of tools
- Universal single face and double face (extra faceplate included)
- Universal mounting pattern knockout in backplate for J-box mounting
- Damp Location Listed

Ordering Information:

Base Model No.	Case Color	Letter Color	Operation	Options
FHEX21	W - White	R - Red	AC - AC Only	DC - Dual Circuit
	B - Black	G - Green	EM - Battery Backup	RC - Remote Capable
				SD - Self Diagnostic

Build part number by adding Base Model No., one of each Case Color, Letter Color, Operation and desired options code(s). Example: FHEX21-B-G-EM-SD