


# Reflector INDOOR



## R20 / R30 / R40 Indoor Reflector CFL

Nominal Wattage	Overdrive Model #	Item Description & CCT	Initial Lumen	Av Rated Life (hrs)	Diameter inch / mm	Length inch / mm	Pack Master	Item #
11	11W/ODR20	11W R20 Reflector- CFL-Soft White	360	10,000	2.5 / 64	5.0 / 126	12	122
11	11W/ODR20/50K	11W R20 Reflector- CFL-Natural DL	360	10,000	2.5 / 64	5.0 / 126	12	123
15	• 15W/ODR30	15W R30 Reflector- CFL-Soft White	700	10,000	3.7 / 95	5.4 / 137	12	037
15	15W/ODR30/41K	15W R30 Reflector- CFL-Cool White	700	10,000	3.7 / 95	5.4 / 137	12	161
15	15W/ODR30/50K	15W R30 Reflector- CFL-Natural DL	700	10,000	3.7 / 95	5.4 / 137	12	092
23	• 23W/ODR40	23W R40 Reflector- CFL-Soft White	1090	10,000	5.0 / 127	6.5 / 165	12	129
23	23W/ODR40/50K	23W R40 Reflector- CFL-Natural DL	1200	10,000	5.0 / 127	6.5 / 165	12	130

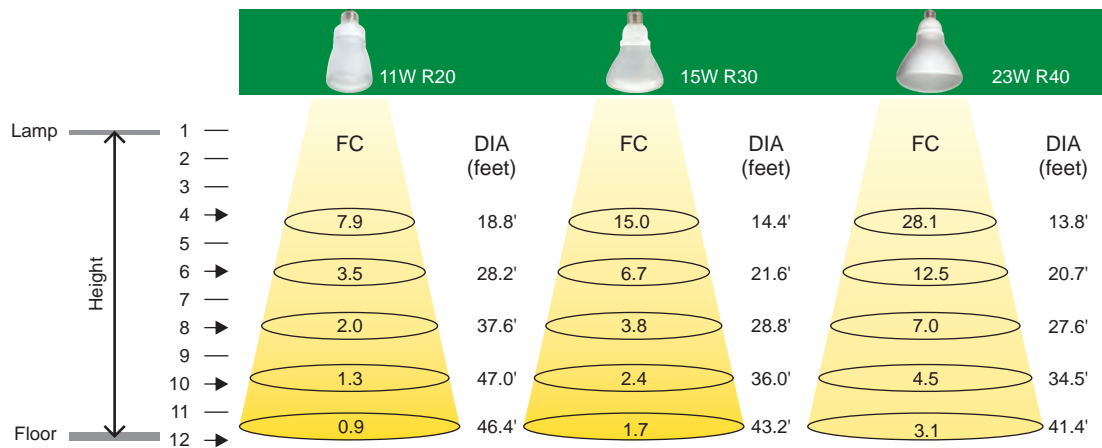

### Applications



PENDANT FIXTURES    RECESSED CANS    TRACK LIGHTING

FC - Foot candle value at beam center



### Features

- 6,000 to 10,000 hour average rated life reduces relamping & related costs
- Rare earth tri-phosphor with 80 plus CRI for better performance
- High Luminous Efficacy
- 75% Lower Power Consumption over incandescent bulbs
- Available in various color temperature
- Size same as incandescent lamp and true retrofit

### Notes

- Not Dimmable
- Available in other color temperature also (upon request)
- Dimension with  $\pm 0.1$  inch tolerance