




GE  
Lighting

**10702 - F26T8/CW/4**

GE T8 - Appliance

- Passes TCLP, which can lower disposal costs.

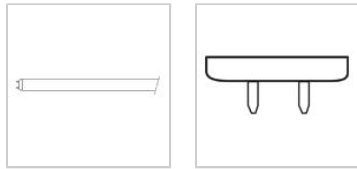

**CAUTIONS & WARNINGS**

Caution


- 

Warning

- 

**GRAPHS & CHARTS**

Lamp Mortality

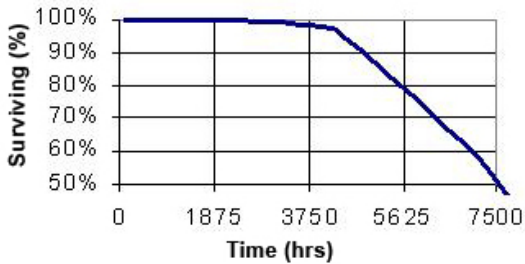

**GENERAL CHARACTERISTICS**

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T8
Base	Medium Bi-Pin (G13)
Rated Life	7500 hrs
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	Soda lime
LEED-EB MR Credit	2212 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Appliance

**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	1275
Mean Lumens	1085
Nominal Initial Lumens per Watt	67
Color Temperature	4100 K
Color Rendering Index (CRI)	60

**ELECTRICAL CHARACTERISTICS**

Wattage	19
Voltage	59.2
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Preheat Voltage	4.25 V

**DIMENSIONS**

Maximum Overall Length (MOL)	26.0000 in(660.4 mm)
Bulb Diameter (DIA)	1.000 in(25.4 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Face to End of Opposing Pin (B) (MAX)	25.500 in(647.7 mm)

**PRODUCT INFORMATION**

Product Code	10702
Description	F26T8/CW/4
Standard Package	Case
Standard Package GTIN	10043168107027
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168107020