



[SITE SEARCH](#)
[HOME](#)
[PRODUCTS](#)
[EDUCATION / RESOURCES](#)
[LIGHTING APPLICATIONS](#)

[Products](#) > 12200

12200 – F35WW/U3/WM

GE Warm White Watt-Miser® Mod-U-line® T12


- Saves energy compared to standard wattage lamps

- ⚡ Reduced Wattage
- Meets Federal Minimum Efficiency Standards
- Energy Savings

Bulb



Base



[Where to Buy](#)

Hospitality	:Net
Restaurant	
Healthcare	
Retail	
Property Management	
Residential Builders	
Automotive	
Oil and Gas	

[View Larger](#)

GENERAL CHARACTERISTICS

Lamp type	Linear Fluorescent - U-Shaped
Bulb	T12
Base	Medium Bi-Pin (G13)
Wattage	35
Rated Life	14000 hrs
Bulb Material	Soda lime
Starting Temperature (MIN)	10 °C (50 °F)
LEED-EB MR Credit	1020 picograms Hg per mean lumen hour

ADDITIONAL RESOURCES


- [Catalogs](#)
- [Testimonials](#)
- [MSDS \(Material Safety Data Sheets\)](#)
- [Disposal Policies & Recycling Information](#)

PHOTOMETRIC CHARACTERISTICS


Initial Lumens	2300
Mean Lumens	2100
Nominal Initial Lumens per Watt	65
Color Temperature	3000 K
Color Rendering Index (CRI)	52

GRAPHS & CHARTS

Lamp Mortality

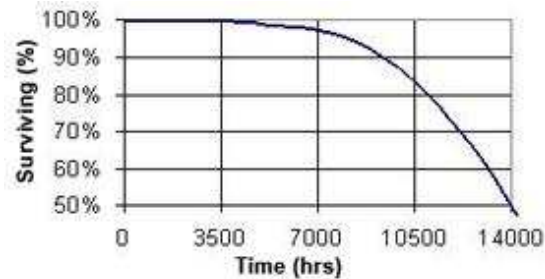

Lumen Maintenance

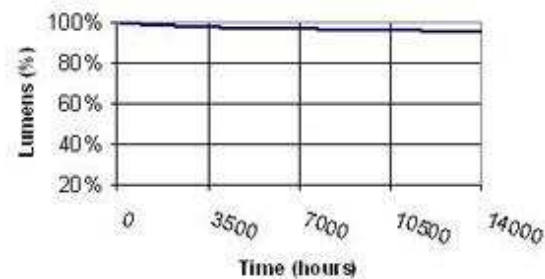

ELECTRICAL CHARACTERISTICS

Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	22.5300 in (572.2 mm)
Minimum Overall Length	22.1300 in (562.1 mm)
Nominal Length	22.500 in (571.5 mm)
Bulb Diameter (DIA)	1.500 in (38.1 mm)
Bulb Diameter in Bend (MIN)	1.330 in (33.7 mm)
Bulb Diameter in Bend (MAX)	1.630 in (41.4 mm)
Bulb Diameter in Legs (MIN)	1.410 in (35.8 mm)

Bulb Diameter in Legs (MAX)	1.590 in (40.3 mm)
Base Face to Top of Lamp	22.130 in (562.1 mm)
Lamp Legs Center to Center Length	3.625 in (92.0 mm)

PRODUCT INFORMATION

Product Code	12200
Description	F35WW/U/3/WM
Standard Package	Case
Standard Package GTIN	10043168122006
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168122009

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
72110	GE140RS120-DIY	1	0.55	0.88
97498	GE240RS120	2	98.0	0.85
97499	GE240RS120-DIY	2	98.0	0.85
24107	GE-240-RS-MV-N	1	99.0	0.87
24773	GE240RS-MV-N-DIY	1	99.0	0.87
24109	GE-340-RS-MV-N	2	99.0	0.87

CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

[Return To Top](#)

Home | Products | EliteNet | Education/Resources | Lighting Applications | Where to Buy | FAQs | Contact Us | Site Map
 Products for Your Home | Press Room | Corporate | Investor Information | Privacy Policy | Accessibility Statement | Terms of Use

Copyright General Electric Company 1997-2009