



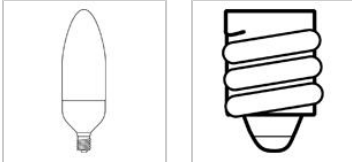

GE
Lighting

16105 - FLE9/2/CAC/827

GE Soft White B10 - Facilities; Retail Display; Hospitality; Office; Restaurant



CAUTIONS & WARNINGS

Warning

- Risk of Electric Shock
 - Do not open - no user serviceable parts inside.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.

NOTES

- Fluorescent lamp lumens decline during life
- Lumens on one piece self ballasted lamp systems are measured base up.
- Use only on 120V 60 Hz circuits. Do not use on dimming circuits, photocells or timers. Do not use in wet locations.

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Self-Ballasted
Bulb	B10
Base	Candelabra Screw (E12)
Rated Life	6000.0 hrs
Starting Temperature (MIN)	-15.0 °C
Total Harmonic Distortion (THD)	125.0 %
LEED-EB MR Credit	1696 picograms Hg per mean lumen hour
Primary Application	Chandelier;Facilities;Retail Display;Hospitality;Office;Restaurant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	430.0
Mean Lumens	344.0
Nominal Initial Lumens per Watt	47
Color Temperature	2700.0 K
Color Rendering Index (CRI)	82.0

ELECTRICAL CHARACTERISTICS

Wattage	9.0
Voltage	120.0
Input Voltage	120.0 V
Input Current	0.1200 A
Power Factor	0.6

DIMENSIONS

Maximum Overall Length (MOL)	5.4000 in(137.2 mm)
Nominal Length	5.400 in(137.2 mm)

PRODUCT INFORMATION

Product Code	16105
Description	FLE9/2/CAC/827
Standard Package	Case
Standard Package GTIN	10043168161050
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168161053