

Presented By: Depot Lighting
Contact Phone: 888.763.6518
Contact E-mail:


Customer Name:
Project Name:
Fixture Type:



GE
Lighting

21303 - F212D/827/4P

GE 2D® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant;
Warehouse

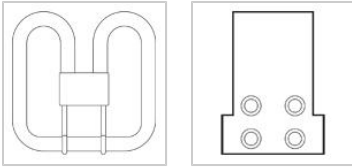

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

NOTES

- 10-watt, 16-watt and 28-watt 2D lamps may be operated in any position. 21-watt, 38-watt, 39-watt, and 55-watt 2D lamps must be used with the leg market (a) in the diagram below the bend (b), in order to avoid overheating the end of the cap marked (c).
- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	GR10q-4
Wattage	21
Voltage	120
Rated Life	10000 hrs
Starting Temperature	-4 °C (25 °F)
LEED-EB MR Credit	352 picograms Hg per mean lumen hour
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;W

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1350
Mean Lumens	1135
Nominal Initial Lumens per Watt	64
Color Temperature	2700 K
Color Rendering Index (CRI)	82

ELECTRICAL CHARACTERISTICS

Current (max)	5.25 A
Open Circuit Voltage Across Starter	198 V
Preheat Voltage	4.25 V
Current Crest Factor	1.7

DIMENSIONS

Maximum Overall Length (MOL)	5.5500 in(141.0 mm)
Nominal Length	5.500 in(139.7 mm)
Base Face to Top of Lamp	1.070 in(27.2 mm)

PRODUCT INFORMATION

Product Code	21303
Description	F212D/827/4P
Standard Package	Case
Standard Package GTIN	00043168213035
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	50
Package	
UPC	043168980586