



GE
Lighting

30899 - 50MR16/Q/40/TL

GE MR16



GENERAL CHARACTERISTICS

Lamp Type	Halogen - MR
Bulb	MR16
Base	Turn and Lock (GU7)
Filament	C-6
Rated Life (NOM)	3500.0 h
Lamp Enclosure Type (LET)	Covered glass

PHOTOMETRIC CHARACTERISTICS

Center Beam Candlepower (CBCP) (NOM)	1395.0
Color Temperature (NOM)	3000.0 K
Beam Spread (NOM)	40.0 °

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	50.0
Voltage (NOM)	12.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.000 in(50.8 mm)
Bulb Diameter (DIA) (NOM)	2.000 in(50.8 mm)

PRODUCT INFORMATION

Product Code	30899
Description	50MR16/Q/40/TL
Standard Package	Case
Standard Package GTIN	00043168308991
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168994521

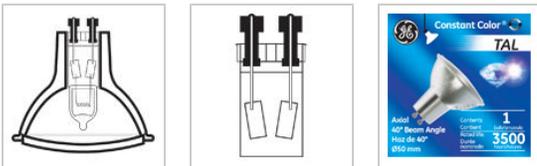

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp to cool before handling.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not use lamp if outer glass is scratched or broken.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.