





GE
Lighting

48866 - F70QBX830A4P/EOL

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

- Super long life

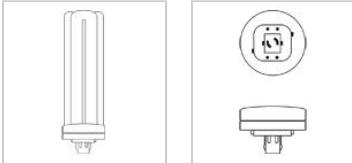

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Amalgam product experience stable brightness over a wider temperature range and in various operating positions.
- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	GX24-q6
Wattage	70
Voltage	120/219
Rated Life	12000 hrs
Starting Temperature	-20 °C (-4 °F)
LEED-EB MR Credit	75 picograms Hg per mean lumen hour
Additional Info	Dimmable with appropriate dimming ballast./End of Life Protection (EOL)/TCLP compliant
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;W

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	5200
Mean Lumens	4470
Nominal Initial Lumens per Watt	74
Color Temperature	3000 K
Color Rendering Index (CRI)	82

ELECTRICAL CHARACTERISTICS

Current Crest Factor	1.7
Supply Current Frequency	20000 Hz

DIMENSIONS

Maximum Overall Length (MOL)	8.2000 in(208.3 mm)
Nominal Length	8.200 in(208.3 mm)

PRODUCT INFORMATION

Product Code	48866
Description	F70QBX830A4P/EOL
Standard Package	Case
Standard Package GTIN	20043168488666
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	10
Package	
UPC	043168488662