




GE
Lighting

97618 - F26TBX/827/4P/ECO

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

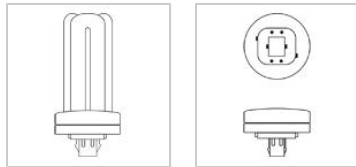

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life
- Non-Amalgam

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	GX24q-3
Equivalent Wattage (NOM)	100.0 W
Rated Life (NOM)	17000.0 h
Starting Temperature (MIN)	0.0 °C
Mercury Content (NOM)	3.0 mg
Picograms of Mercury (NOM)	115.3 pg
Rated Life (rapid start) @ Time	17000.0 @ 3.0/20000.0 @ 12.0 h
Additional Info	Dimmable with appropriate dimming ballast./End of Life Protection (EOL)/TCLP compliant
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;Warehouse

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1800.0
Mean Lumens (NOM)	1530.0
Nominal Initial Lumens per Watt (NOM)	69.23077
Color Temperature (NOM)	2700.0 K
Color Rendering Index (CRI) (NOM)	82.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	26.0
Voltage (NOM)	120.0
Lamp Current (NOM)	0.325 A
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.200 in(132.1 mm)
Nominal Length (NOM)	5.200 in(132.1 mm)

PRODUCT INFORMATION

Product Code	97618
Description	F26TBX/827/4P/ECO
ANSI Code	60901-IEC-3426-1
Standard Package	Case
Standard Package GTIN	10043168976180
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168976183