

4" DOWNLIGHT 10W

TITANIUM CRI^{SP} LED SERIES 4.0




10W REPLACES



**50W
Inc.**

80% Energy Savings

CRI^{SP}

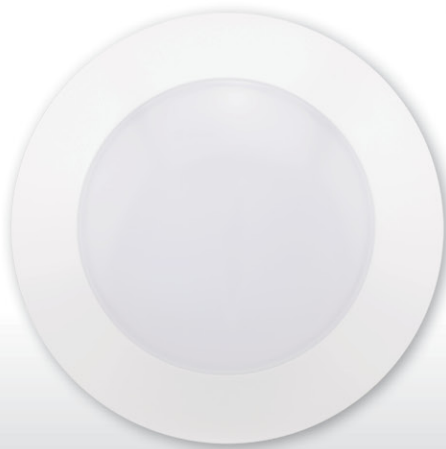

\$156 Savings
per lamp*

- ⌚ Innovative CLICK design
- ⌚ Fits most 4" J-boxes and 4" recessed housings
- ⌚ Installs in just minutes - no rewiring
- ⌚ Exceptional color rendering CRI 90
- ⌚ Richer reds and natural skin tones (R9 60, R13 90)
- ⌚ Tight LED binning for consistent CCT across all lamps



40,000 H



DIMMABLE



EFFICACY



WARRANTY



CRI (Ra)




SEMI DIRECTIONAL

DOWNLIGHT PRODUCT FEATURES

DUAL INSTALLATION:


4" J-BOX FLUSHMOUNT

- Attach mounting bracket to J-box
- Click downlight into mounting bracket




4" CAN RECESSED

- Connect E26 adapter to the LED adapter
- Insert mounting clips and push downlight up until flush with ceiling



ACCESSORIES INCLUDED:



Mounting
Bracket



J-Box
Screws



Wire
Nuts



LED
Adapter



E26
Adapter



Mounting
Clips

4" DOWNLIGHT 10W TITANIUM CRI^{SP} LED SERIES 4.0



APPLICATIONS

General Lighting



Recessed Lighting



Accent Lighting



SPECIFICATIONS**

Product Model	40833 10SMDL4G4DIM/927	40834 10SMDL4G4DIM/930
Type	4" SMDL	4" SMDL
Base	E26 / LED Adapter (GU24 optional)	E26 / LED Adapter (GU24 optional)
Power (W)	10	10
Voltage - Frequency	120V 60Hz	120V 60Hz
Color Temp. (ANSI)	Warm White 2700K	Warm White 3000K
CRI (Ra)	90	90
Typical lumens (lm)	600	625
Efficacy (LPW)	60	63
Beam Angle	110°	110°
Dimmable	Yes***	Yes***
Housing Compatibility	4" J-box / Most 4" housing	4" J-box / Most 4" housing
Power Factor	0.9	0.9
Rated Lifetime - L70 (hrs.)	40,000	40,000
Dia. x MOL	5.50"x1.24" (140x31mm)	5.50"x1.24" (140x31mm)
Weight (lb. / g)	0.26lb. / 118g	0.26lb. / 118g

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$4 incandescent with 1000-hr lifetime, \$28 LED with 40,000-hr lifetime
 ** Specification data is preliminary and may be subject to change

*** List of tested dimmer switches available on website
 **** Suitable for damp locations. Not for use where directly exposed to weather or water