


INCANDESCENT LAMPS

General Service

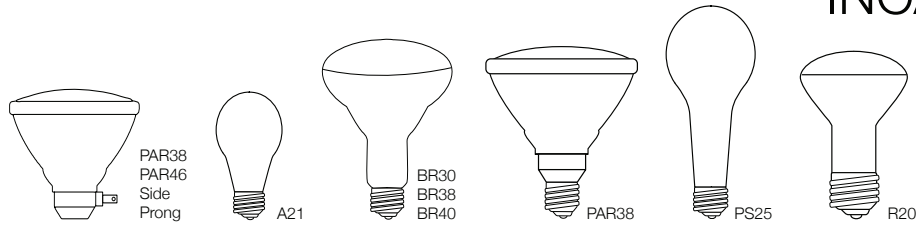

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
100 WATT continued												
BR30	Med.	104026	6,10	BR30CL100/12V	Clear Pool Lamp	12/24	12	1200	2000	C-6	5.37"	-
BR38	Med.	404112	9	BR38AMB100	Amber Flood	12/24	130	-	5000	C-9	5.50"	-
		404113	9	BR38BLU100	Blue Flood	12/24	130	-	5000	C-9	5.50"	-
		404114	9	BR38GRN100	Green Flood	12/24	130	-	5000	C-9	5.50"	-
		404116	9	BR38RED100	Red Flood	12/24	130	-	5000	C-9	5.50"	-
		404119	9	BR38YEL100	Yellow Flood	12/24	130	-	5000	C-9	5.50"	-
R20	Med.	104020	2,6,10	R20CL100/12V	Clear Pool Lamp	10/100	12	950	2000	C-6	3.55"	-
100/200/300 WATT												
PS25	Mog.	8005	1	PS25SW3W300	Soft White 3-Way 100/200/300 Prism®	12/60	120	1200/ 2600/ 3800	1200	CC-6	6.93"	-
120 WATT												
BR40	Med.	404065	6	BR40FL120/5/CS	CoverShield®	1/24	120	-	5000	C-9	6.56"	-
PAR38	Side Prong	65058	X,4,13	PAR38/3SP120	Spot	1/12	120	1370	2000	CC-6	4.30"	18°
		65059	X,4,13	PAR38/3FL120	Flood	1/12	120	1370	2000	CC-6	4.30"	30°
125 WATT												
BR40	Med.	204035	6,11	BR40CL125/1	Clear Infrared Prism®	12	120	-	6000	C-9	6.56"	-
150 WATT												
A21	Med	6043		A21RS150/P5/CS	CoverShield®	1/60	130	-	5000	C-9M	5.00"	-
PS25	Med.	401345	3	PS25CL150/P5/CS	CoverShield® Prism® Long Life Plus™	1/60	130	-	5000	C-9M	6.93"	-
		104012	X	R40GRO150	Plant Grow	12	120	-	5000	C-9	6.56"	-
200 WATT												
PAR46	Side Prong	65064	4,13	PAR46/3MFL200	Medium Flood	1/12	120	2270	2000	CC-13	4.00"	25x15
		65065	4,13	PAR46/3NSP200	Narrow Spot	1/12	120	2270	2000	CC-13	4.00"	12x8
PS25	Med.	401347	3	PS25CL200/P5/CS	CoverShield® Prism® Long Life Plus™	1/60	130	-	5000	C-9M	6.93"	-
250 WATT												
BR40	Med.	404068	6,11	BR40CL250/1	Clear Heat Prism®	12	120	-	5000	C-9	6.56"	-
		404066	6,11,16	BR40CL250/1/CSTF	Clear CoverShield® PFA Prism®	1/12	120	-	5000	C-9	6.56"	-
PAR38	Med.	15558		Q250PAR/FL	Flood Major	1/6	120	3600	4200	CC-8	5.31"	30°
		15526		Q250PAR/SP	Spot Major	1/6	120	3600	4200	CC-8	5.31"	10°
R40	Med.	104044	6,11	R40RED250/10	Red Heat Prism®	12	120	-	5000	C-9	6.56"	-
		404071	6,11,16	R40RED250/10/CSTF	Red CoverShield® PFA Prism®	1/12	120	-	5000	C-9	6.56"	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.