



## PERFORMANCE

- Minimum Starting Temperature: -20°F
- Maximum Case Temperature: 194°F, 90°C
- OCV: 590V

## APPROVALS

- HL Type - Hazardous Location
- UL, cUL 935 Listed
- Class P
- Type 2 Outdoor



## WIRE LENGTHS

- (1) Black 24"
- (1) White 24"
- (2) Brown 46"
- (2) Yellow 75"
- (2) Blue 75"
- (2) Blue/White 46"
- (2) Red 46"

**3 YEAR WARRANTY FROM DATE OF MANUFACTURE**

## MAGNETIC FLUORESCENT SIGN BALLAST


<b>Ballast Type</b>	Magnetic	<b>Starting Method</b>	Rapid Start
<b>Lamp Connection</b>	Series	<b>Input Voltage</b>	120Vac +5/ -10%
<b>Input Frequency</b>	60Hz		

## Electrical Specifications

Lamp Type	No. of Lamps	Lamp Footage	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
<b>F36T12/HO</b>	2	6	123	1.17	>0.92	<1.8	1.06	0.86	45
<b>F60T12/HO</b>	4	20	300	2.66	>0.94	<1.8	0.96	0.32	15
<b>F72T12/HO</b>	3	18	260	2.31	>0.97	<1.8	0.96	0.37	15

## Physical Dimensions

Length (L): 11.75"  
 Width (W): 3.19"  
 Height (H): 2.60"  
 Mounting (M): 11.0"

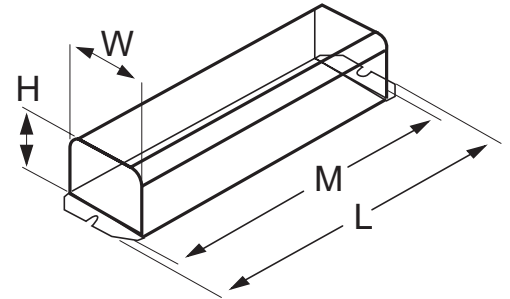

## Wiring Diagram

