



## Value and versatility defined

Our new “traditional-style” LED luminaires offer the shapes you’ve grown accustomed to coupled with the high-powered, energy-efficient LEDs you want.

This fixture was designed to fit seamlessly — eliminating unwanted markings from the removal of older fixtures. **Replace one or replace them all, either case, with energy-savings of up to 80%, Lithonia has you covered!**



TWS LED 1 replaces up to **70W HPS**




# Value and versatility defined

www.lithonia.com




Mounts to a recessed junction box — **lower mounting height, 7-10 feet**

## Product Dimensions

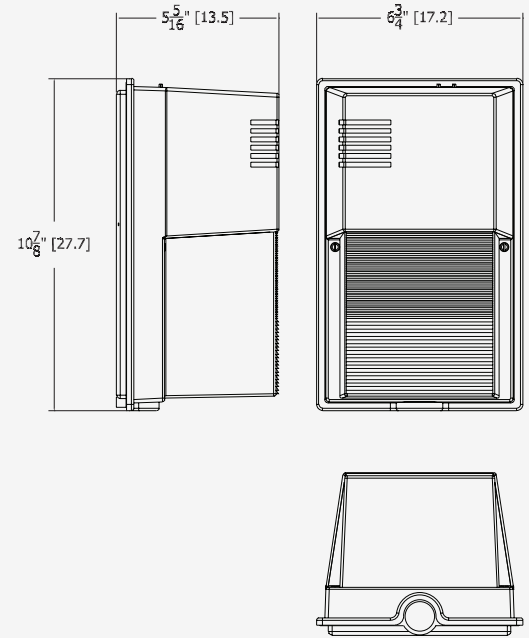

- **Impact resistant polycarbonate lens** provides an **even light distribution** and protects electronics
- 100,000 hour LED life<sup>1</sup>
- Includes standard photo cell for dusk to dawn operation
- **Cast aluminum back plate** dissipates heat from LEDs to promote long life
- Highly efficient LEDs provide **54 lumens per watt**

<sup>1</sup> LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.

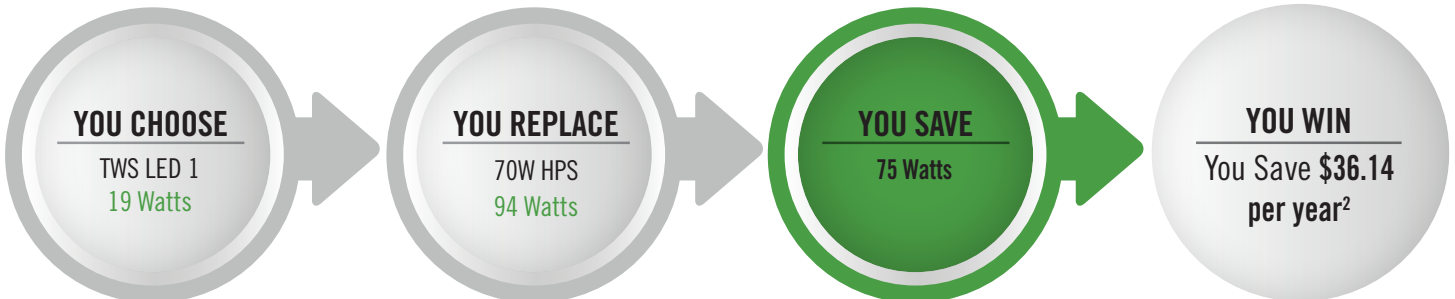

<sup>2</sup>Based on 12 hours operation per day and energy costs of \$.11 per kWh

### ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: TWS LED 1 50K 120 PE

| Series         |               | Performance Package | Color Temperature (CCT) | Voltage       | Control Options                    | Finish              |
|----------------|---------------|---------------------|-------------------------|---------------|------------------------------------|---------------------|
| <b>TWS LED</b> | LED Wall Pack | 1 1017 lumens       | 50K 5000K <sup>3</sup>  | 120 120 volts | PE Photoelectric Cell, Button Type | (blank) Dark Bronze |



### Notes

<sup>3</sup> Correlated Color Temperature (CCT) shown is nominal per ANSI C78,377-2008.