




DEFINITY™ DFN19

BENEFITS

- Dimmable to 5% of light on most dimmers.³
- RoHS compliant – contains no mercury or lead.

FEATURES¹

L70 lumen depreciation design criteria =	50,000 hours
ENERGY STAR Life =	35,000 hours ²
Housing	Aluminum
Socket	E26 Edison base (US)
Operating Temperature	-20° C to +40° C
MOL	4.39 in, 111.60mm
Voltage	120 VAC
Weight	0.33lbs., 150g
Power Factor	≥.90
Warranty	5 year limited

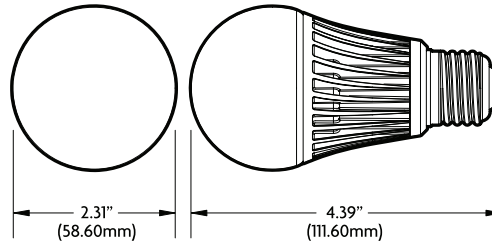

Specifications supplied are nominal. Please refer to the DOE's Lighting Facts Tolerance Guidelines.

¹ Values are nominal, advances from further innovation, specifications are subject to change.

² Qualified ENERGY STAR rating at or above 6,000 hour life testing.

³ See dimmer compatibility chart page on next page.

ORDERING INFORMATION \ \ DFN 19 WW 120

Family	Product	Color (CCT)	Voltage
DFN Definity	19 DFN19	W27 Warm White 2700K	120 120 Volt
		WW Warm White 3000K	
		NW Neutral White 4000K	
		CW Cool White 5000K	

CERTIFICATIONS NORTH AMERICA



ENVIRONMENT





DIMMER CAPABILITIES

LUTRON DIMMERS: Commecrcl Systems QSG-6P, LP-RPM-4A-120; Diva DV-600, DVCL-153P; **Interfaces** PHPM-WBX; **Homeworks** HW-RPM-4A-120, HxD-6ND; **Radio Ra** RRD-10ND; **Stanza** SZ-6ND; **Lutron** S-600PR-WH, DV-600PR-WH, TG-600PR-WH, AY600P, Q600P, GL600, CN-600PHW, DV-603PG, S-600, S-600P, LG-600P, D-600PH, TT-300NLH, TG-603PG, DV-600PR-WH **OTHER DIMMERS:** **Ace** 34050, 3027596 **Leviton** 6633-PL, 6684, 6631, IPI06-1LX **Legrand** DrRD4W

DFN19¹

Part Number	Base Type	Watts	Lumens	Voltage	Efficacy	CRI	ENERGY STAR ²
DFN 19 NW 120	E26	8W	450	120	56	85	✓
DFN 19 WW 120	E26	8W	425	120	53	85	✓
DFN 19 W27 120	E26	8W	395	120	49	85	
DFN 19 CW 120	E26	8W	570	120	71	67	

NW: Neutral White WW: Warm White W27: Warm White 2700K CW: Cool White

Specifications supplied are nominal. Please refer to the DOE's Lighting Facts Tolerance Guidelines.

¹ Values are nominal, advances from further innovation, specifications are subject to change.

² Qualified ENERGY STAR rating at or above 6,000 hour life testing.

Cautions

- Turn power off before inspection, installation, or removal.
- Risk of Electric Shock – Use in dry locations only. Do not use where directly exposed to water or weather.
- Do not open – no user serviceable parts inside.
- North America use on 120VAC, 50 - 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Added weight of the device may cause instability of a freestanding portable luminaire.
- Use only with a portable table lamp that is provided with a shade.
- Use in portable table lamps in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.
- This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.