

# xBR™ 30

Dimmable



xBR™ 30

120~



2700K

3000K



## PRODUCT SUMMARY

- 11.5 Watts, Replaces 70 W incandescent lamps
- Dimmable to 5% with most incandescent dimmer
- Designed to last 50,000 hours
- Five year warranty
- No UV or IR radiation
- Voltage: 120VAC
- 0.9 Power Factor
- Socket Type: Medium Screw Base
- Environment: Dry and Damp locations
- Length: 5.25 in, 134 mm
- Diameter: 3.75 in, 95 mm
- Weight: 12.5 ounces, 354 grams


The xBR30 from MSi is a LED downlight for use in residential and hospitality applications. The lamp is designed to produce smooth beam patterns and delivers warm white for general illumination applications.




Catalog#	CCT (K)	CRI	Beam Spread	Lumens
BR3027FL1D	2700	82	Flood	740
BR3030FL1D	3000	82	Flood	820



### CANDELA DISTRIBUTION

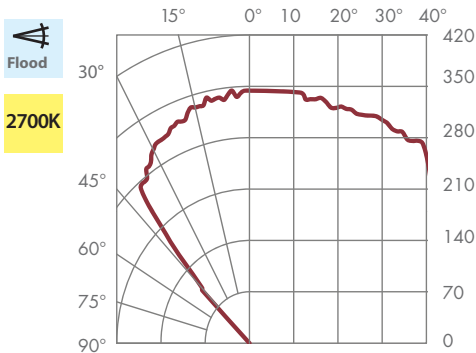

### BEAM DISTRIBUTION

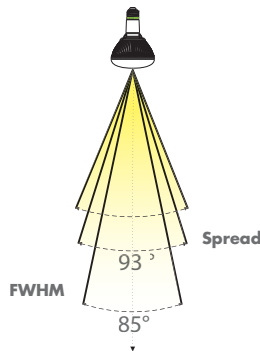

### 0° AIMING FOOTCANDLES

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	9.2'	14
10'	18.3'	3.5
15'	27.5'	1.6
20'	36.7'	0.9

1342 South Powerline Road, Deerfield Beach, FL 33442

Toll Free 888.778.9864 | Fax Orders to: 954-971-3725 | info@msissl.com | www.msissl.com