


**NT-28 / NT-29
Eyeball with Metal Trim**

Type
Project
Catalog No.
Lamp/Wattage

TRIM DIMENSIONS

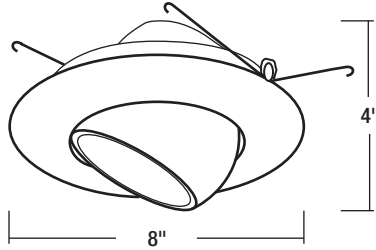

Trim OD: 8"
Height: 4"

FEATURES

Trim

Adjustable metal trim can be rotated 358° horizontally and 30° vertically.

Mounting

Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Remove socket from socket plate within housing (if applicable), and mount lamp on eyeball.

Compatible Housings

Compatible with Line Voltage, Sloped Line Voltage, and GU24 housings. See individual specification sheets for more information.

Lamp

Line Voltage

75W BR/PAR30 Maximum (NH-26Q, NH-26QNB, NH-27Q, NHIC-17/100DWQA, NHIC-17QAT, NHIC-17QNBAT, NHIC-27QAT, NHR-26Q, NHR-27Q, NHRIC-17QAT, NHRIC-17QNBAT, NHRIC-27QAT)

Sloped Line Voltage

75W BR/PAR30 Maximum (NH-926Q; NHIC-926/DWQAT; NHIC-926QAT; NHR-926Q; NHRIC-926QAT)

GU24 Compact Fluorescent

15W R30 GU24 (NHIC-6G24ATFL; NHRIC-6G24ATFL)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

Compatible Housings

LINE VOLTAGE		
Item Number	Installation Type	Dimensions
<input type="checkbox"/> NH-26Q	Non-IC New Construction	W: 7" L: 10-1/8" H: 7-1/2"
<input type="checkbox"/> NH-26QNB	Non-IC New Construction - No Bracket	W: 7" L: 10-1/8" H: 7-1/2"
<input type="checkbox"/> NH-27Q	Non-IC Shallow New Construction	W: 7" L: 10-1/8" H: 5-1/2"
<input type="checkbox"/> NHIC-17/100DWQA	IC Double Wall Air-Tight New Construction	W: 9-1/8" L: 12-1/2" H: 7-3/4"
<input type="checkbox"/> NHIC-17QAT	IC Air-Tight New Construction	W: 7" L: 10-1/8" H: 7-1/2"
<input type="checkbox"/> NHIC-17QNBAT	IC Air-Tight New Const. - No Bracket	W: 7" L: 10-1/8" H: 7-1/2"
<input type="checkbox"/> NHIC-27QAT	IC Air-Tight Shallow New Construction	W: 7" L: 10-1/8" H: 5-1/2"
<input type="checkbox"/> NHR-26Q	Non-IC Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"
<input type="checkbox"/> NHR-27Q	Non-IC Shallow Remodel Housing	W: 6-3/4" L: 13-3/4" H: 5-1/2"
<input type="checkbox"/> NHRIC-17QAT	IC Air-Tight Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"
<input type="checkbox"/> NHRIC-17QNBAT	IC Air-Tight Remodel - No Bracket	W: 6-3/4" L: 13-3/4" H: 7-1/2"
<input type="checkbox"/> NHRIC-27QAT	IC Air-Tight Shallow Remodel Housing	W: 6-3/4" L: 13-3/4" H: 5-1/2"
SLOPED LINE VOLTAGE		
<input type="checkbox"/> NH-926Q	Non-IC New Construction	W: 9-1/2" L: 13" H: 7"
<input type="checkbox"/> NHIC-926/DWQAT	IC Double Wall Air-Tight New Construction	W: 9-1/2" L: 13" H: 7-3/4"
<input type="checkbox"/> NHIC-926QAT	IC Air-Tight New Construction	W: 9-1/2" L: 13" H: 7"
<input type="checkbox"/> NHR-926Q	Non-IC Remodel Housing	W: 7-1/8" L: 13" H: 7-1/2"
<input type="checkbox"/> NHRIC-926QAT	IC Air-Tight Remodel Housing	W: 7-1/8" L: 13" H: 7-1/2"
GU24 COMPACT FLUORESCENT		
<input type="checkbox"/> NHIC-6G24ATFL	IC Air-Tight New Construction	W: 7" L: 10-1/8" H: 7-1/2"
<input type="checkbox"/> NHRIC-6G24ATFL	IC Air-Tight Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"

Eyeball with Metal Trim

- NT-28: White Eyeball with White Metal Trim
- NT-28B: Black Eyeball with Black Metal Trim
- NT-28BZ: Bronze Eyeball with Bronze Metal Trim
- NT-28CO: Copper Eyeball with Copper Metal Trim
- NT-28N: Natural Metal Eyeball with Natural Metal Trim
- NT-29C: Chrome Eyeball with Chrome Metal Trim
- NT-29G: Gold Eyeball with Gold Metal Trim