


**NT-5060  
PAR30 Gimbal Ring with Metal Trim**

Type \_\_\_\_\_  
 Project \_\_\_\_\_  
 Catalog No. \_\_\_\_\_  
 Lamp/Wattage \_\_\_\_\_

**TRIM DIMENSIONS**



Trim OD: 6-1/2"

**FEATURES**

**Trim**  
 Adjustable metal gimbal ring can be adjusted up to 28° with a short neck, and 19° with a long neck.

**Mounting**  
 Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).


**Compatible Housings**  
 Compatible with Line Voltage housings.  
 See individual specification sheets for more information.

**Lamp**  
**Line Voltage**  
 50W PAR30 Maximum (NHIC-501QAT; NHRIC-504QAT)  
 75W PAR30 Maximum (NH-501Q; NHR-504Q)


**Labels and Listings**  
 cULus Listed for Damp Location when used with compatible housing.

**HOUSING DIMENSIONS**

**NH-501Q / NHIC-501QAT**

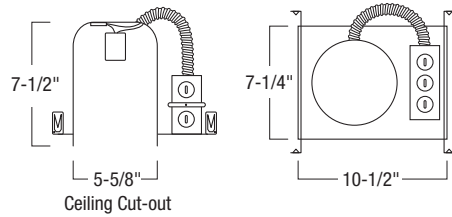

**NHR-504Q / NHRIC-504QAT**

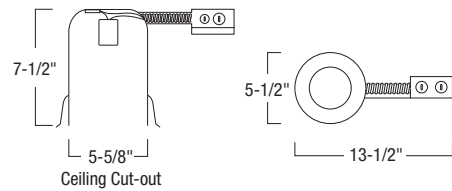

**PAR30 Gimbal Ring with Metal Trim**

- NT-5060B:** Black Metal Trim with Gimbal Ring
- NT-5060BZ:** Bronze Metal Trim with Gimbal Ring
- NT-5060CO:** Copper Metal Trim with Gimbal Ring
- NT-5060N:** Natural Metal Trim with Gimbal Ring
- NT-5060W:** White Metal Trim with Gimbal Ring

**Compatible Housings**

LINE VOLTAGE			
Item Number	Installation Type	Lamp	Dimensions
<input type="checkbox"/> <b>NH-501Q</b>	Non-IC New Construction	75W PAR30	W: 7-1/4" L: 10-1/2" H: 7-1/2"
<input type="checkbox"/> <b>NHIC-501QAT</b>	IC Air-Tight New Construction	50W PAR30	W: 7-1/4" L: 10-1/2" H: 7-1/2"
<input type="checkbox"/> <b>NHR-504Q</b>	Non-IC Remodel Housing	75W PAR30	W: 5-1/2" L: 13-1/2" H: 7-1/2"
<input type="checkbox"/> <b>NHRIC-504QAT</b>	IC Air-Tight Remodel Housing	50W PAR30	W: 5-1/2" L: 13-1/2" H: 7-1/2"