



Switch Start MH Std 1500W Mog BT56 CL

Product family description
Range of Switch Start quartz metal halide lamps for long life and high efficiency.

Features/Benefits

- Long life up to 20,000 hours for 360 and 400 watt lamps.
- Up to 100 lumens per watt.

Applications

- Ideal for industrial and retail high/low bays, and parking lots.

Notes


- Color characteristics may vary somewhat from one lamp type to another. Time should be allowed for the lamp to stabilize in color when it is turned on for the first time or if for any reason its operating position is changed. This may require several hours' operation, with more than one start. Lamp color and output may change temporarily if the lamp is subjected to excess vibration or shock. Lamp color characteristics may change after long accumulate operating time. (372)
- Rated average life is the life obtained, on the average, from large representative groups of lamps in laboratory tests under controlled conditions at 10 or more operating hours per start. It is based on survival of at least 50% of the lamps and allows for individual lamps or groups of lamps to vary considerably from the average. For lamps with a rated average life of 24,000 hours, life is based on survival of 67% of the lamps. (351)
- Rated average life hours for universal lamps is based on vertical operating position. Operating these lamps in other position will reduce the life by approximately 25% of the rated average life hours.
- Approximate lumen values listed are for vertical operation of the lamp. (352)
- Means Lumens is the approximate lumen output at 40% of lamp rated average life. (353)
- Heat resisting glass bulb.

Product data	
Product Number	131623
Full product name	Switch Start MH Std 1500W Mog BT56 CL
Ordering Code	MH1500/U
Pack type	1 Sleeve Open End
Pieces per Sku	1
Skus/Case	6
Pack UPC	046677131623
EAN2US	


Product data	
Case Bar Code	50046677131628
Successor Product number	
Base	Mogul [Mogul]
Base Information	Brass [Brass Base]
Bulb	BT56
Bulb Material	Hard Glass
Bulb Finish	Clear
Operating Position	Universal [Any or Universal (U)]
Packing Type	1SL [1 Sleeve Open End]
Packing Configuration	6
RatedAvgLife(See Family Notes)	3000 hr
Ordering Code	MH1500/U
Pack UPC	046677131623
Case Bar Code	50046677131628
Energy Saving	Not Applicable
ANSI Code HID	M48/E
Watts	1500W
Lamp Voltage	268 V
Mercury (Hg) Content	203.9 mg
Color Code	635 [CCT of 3500K]
Color Rendering Index	60 Ra8
Color Designation	White
Color Temperature	3700 K
Initial Lumens	155000 Lm
Design Mean Lumens	124000 Lm
Light Center Length L	9.5 in
Max Overall Length (MOL) - C	15.375 in
Diameter D	7 in
Product Number	131623




SS MH Std BT56 CL

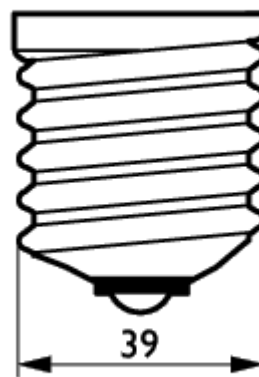

Base Mogul

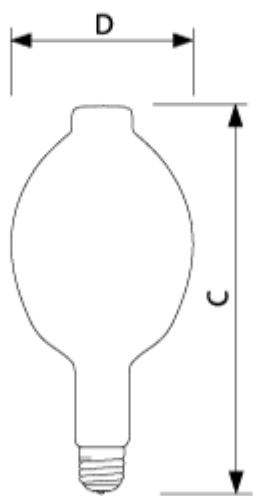

SS MH Std BT56

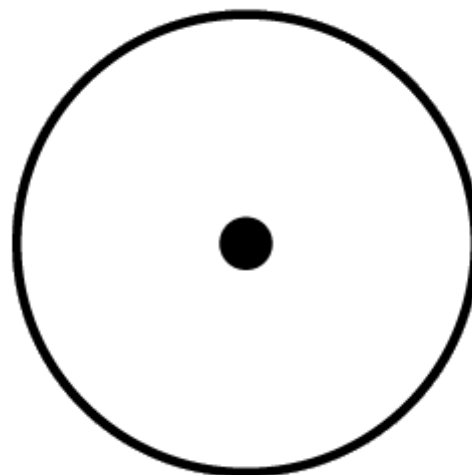

Operating Position Universal

