

MasterColor CDM-i 25W PAR38 WFL/3K 1CT

Product family description MasterColor® Integrated Ceramic Metal Halide PAR38 Protected

Features/Benefits

- · Mastercolor Technology
- Energy Saving Up to 3x less energy consumption than standard PAR38 halogen lamps with comparable light output.
- Lasts up to to 3x longer than standard halogen PAR38
- Very good color rendering
- · Crisp white light
- Integrated Electronic Ballast Easy upgrade and instant retrofit from halogen PAR38
- Familiar PAR38 Shape and Size
- Simple 'twist in' for one step easy installation
- Easy maintenance
- 10,25, and 40 degree beam spread

Applications

• Ideal for general, ambient, or accent lighting.

Notes

• Rated average life is the life obtained, on the average, from large representative groups of lamps in laboratory tests under controlled conditions at 10 or more operating hours per start. It is based on survival of at least 50% of the lamps and allows for individual lamps or groups of lamps to vary considerably from the average.

Product data		
Product Number	144790	
Full product name	MasterColor CDM-i 25W PAR38 WFL/3K 1CT	
Ordering Code	144790	
Pack type	1 Lamp in a Folding Carton	
Pieces per Sku	1	
Skus/Case	6	
Pack UPC	046677144791	
EAN2US		
Case Bar Code	50046677144796	



Product data		
Base	Medium [Single Contact Medium Screw]	
Bulb	PAR38 [PAR 4.75 inch/121mm]	
Operating Position	Universal [Any or Universal (U)]	
Packing Type	1CT [1 Lamp in a Folding Carton]	
Packing Configuration	6	
Ordering Code	CDM-I 25/PAR38/WFL/3K	
Pack UPC	046677144791	
Case Bar Code	50046677144796	
Watts	25W	
Lamp Voltage	120 V	
Dimmable	No	
Beam Angle	40D	
Approx. MBCP	2100 cd	
Color Code	830 [CCT of 3000K]	
Color Rendering Index	87 Ra8	
Color Designation	Warm White	
Color Description	830 Warm White	
Color Temperature	3000 K	
Initial Lumens	1275 Lm	
Overall Length C	135 mm	
Diameter D	124 mm	
Special Note	WFL/3K [Wide Flood/3K]	
Product Number	144790	




CDM-i 25W Medium PAR38




Base Medium







Operating Position Universal



CDM-i 25W/830 40D




CDM-i 25W/830 40D



CDM-i 25W/830 40D



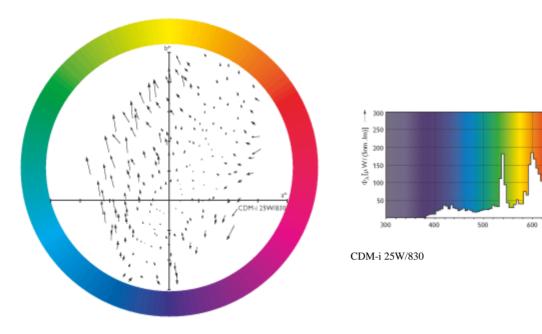

CDM-i 25W/830

