



FB40T12/6 DX

Product family description
T12 Medium Bi-Pin Fluorescent Lamps.

Features/Benefits

- 6 inch leg spacing.

Notes


- Rated average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Lamp life is appreciably longer if lamps are started less frequently. (202)
- Approximate Initial Lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life, when the output is measured during operation on a reference ballast under standard laboratory conditions. (203)
- For expected lamp lumen output, commercial ballast manufacturers can advise the appropriate Ballast Factor for each of their ballasts when they are informed of the designated lamp. The Ballast Factor is a multiplier applied to the designated lamp lumen output. (204)
- Design Lumens are the approximate lamp lumen output at 40% of the lamp's Rated Average Life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions. (208)

Product data	
Product Number	219931
Full product name	FB40T12/6 DX
Ordering Code	FB40/DX/6
Pack type	1 Lamp
Pieces per Sku	1
Skus/Case	12
Pack UPC	046677219932
EAN2US	
Case Bar Code	50046677219937
Successor Product number	
Base	Medium Bi-Pin [Medium Bi-Pin Fluorescent]
Base Information	Aluminum [Aluminum Base]
Bulb	T12-6U [U-bent T 12/8 inch with 6" spacing]
Packing Type	ILP [1 Lamp]
Packing Configuration	12
Type	FB40T12/6


Product data	
Rated Avg. Life [3 hr Start]	18000 hr
Ordering Code	FB40/DX/6
Pack UPC	046677219932
Case Bar Code	50046677219937
Energy Saving	Not Applicable
Watts	40W
Mercury (Hg) Content	10.0 mg
Color Code	57
Color Rendering Index	84 Ra8
Color Designation	Daylight Deluxe
Color Temperature	6500 K
Initial Lumens	2250 Lm
Design Mean Lumens	1950 Lm
Nominal Length [inch]	22.44
Product Number	219931



F-T12-UR Med Bipin/AL



Base Medium Bi-Pin

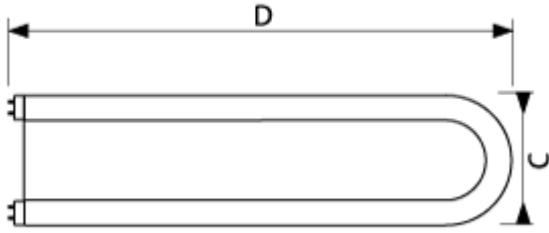

F-T12-UR Med Bipin

